


Size (inches) Nominal W x H x D	Size (inches) Actual W x H x D	Koch Part Number	Capacity (CFM)	Initial Resistance (inches W.G.)	Media Area (Sq. Ft.)
10 x 20 x 1	9 1/2 x 19 1/2 x 3/4	102-790-001	425	0.37	2.3
12 x 20 x 1	11 1/2 x 19 1/2 x 3/4	102-051-002	500	0.37	2.8
12 x 24 x 1	11 3/8 x 23 3/8 x 3/4	102-790-002	600	0.37	3.3
14 x 20 x 1	13 1/2 x 19 1/2 x 3/4	102-790-003	590	0.37	3.3
14 x 25 x 1	13 1/2 x 24 1/2 x 3/4	102-790-004	730	0.37	4.1
15 x 20 x 1	14 1/2 x 19 1/2 x 3/4	102-790-005	625	0.37	3.5
16 x 20 x 1	15 1/2 x 19 1/2 x 3/4	102-790-006	670	0.37	3.8
16 x 25 x 1	15 1/2 x 24 1/2 x 3/4	102-790-007	840	0.37	4.7
18 x 24 x 1	17 3/8 x 23 3/8 x 3/4	102-051-016	900	0.37	5.1
18 x 25 x 1	17 1/2 x 24 1/2 x 3/4	102-051-011	940	0.37	5.3
20 x 20 x 1	19 1/2 x 19 1/2 x 3/4	102-790-008	840	0.37	4.7
20 x 25 x 1	19 1/2 x 24 1/2 x 3/4	102-790-009	1050	0.37	5.9
24 x 24 x 1	23 3/8 x 23 3/8 x 3/4	102-790-010	1200	0.37	6.8
25 x 25 x 1	24 1/2 x 24 1/2 x 3/4	102-051-014	1310	0.37	7.4

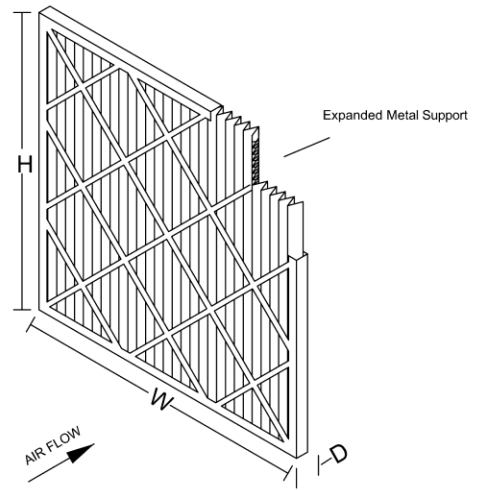

Standard Construction:

1. 100% Synthetic Media Upstream and Impregnated Carbon Media Downstream
2. Rust Resistant Expanded Metal Support on Downstream Side
3. Moisture Resistant Beverage Board Frame (24 point)
4. Double Wall Frame
5. 12 Pleats per Linear Ft.
6. Carbon Weight: 77 gsm

Specifications:

1. Efficiency: MERV 8 (ASHRAE Standard 52.2-2012)
2. Efficiency: 25-30% (ASHRAE Standard 52.1-1992)
2. Final Resistance: 1.0" W.G.
3. Rated Velocity: 300 FPM
4. Classified per UL Standard 900
5. Max Operating Temp: 150 degree Fahrenheit and 66 Celsius
6. Tolerance: Height & Width - +/- 1/8"
7. Tolerance: Depth - +/- 1/16"



Odorkleen ES
1" Standard Capacity

Drawn By:	Matt Ball	REV.
Date:	August 19, 2013	F