

CARBON STEEL & STAINLESS STEEL BRAKE WINCHES


Features

- Compact design
- Ergonomic rubber handle
- Multiple frame mounting positions
- Solid machined gear
- Dual cable anchor point
- Drill drive adapter standard on stainless steel. Optional on carbon steel
- Automatic weatherproof weston style load brake
- High gear ratio
- Test certificate & serial number
- For lifting or pulling/tensioning
- Left hand version of stainless steel winch available (OZ1000BWSS-LH)

Cable/Drum Capacity	1st layer (ft)	Mid drum (ft)	Full drum (ft)
OZ1000BW – OZ1000BWSS using 1/8" wire rope	7	74	140
OZ1000BW – OZ1000BWSS using 3/16" wire rope	5	34	75
OZ1500BW – OZ1500BWSS using 3/16" wire rope	7	66	140
OZ1500BW – OZ1500BWSS using 1/4" wire rope	5	27	89
OZ2000BW – OZ2000BWSS using 1/4" wire rope	8	36	85
OZ2000BW – OZ2000BWSS using 5/16" wire rope	7	22	52

Load Capacity (lbs - based on the amount of wire rope)			
OZ1000BW – OZ1000BWSS	1000	750	500
OZ1500BW – OZ1500BWSS	1500	1250	750
OZ2000BW – OZ2000BWSS	2000	1500	1000

*Wire rope not included - see available options page 34

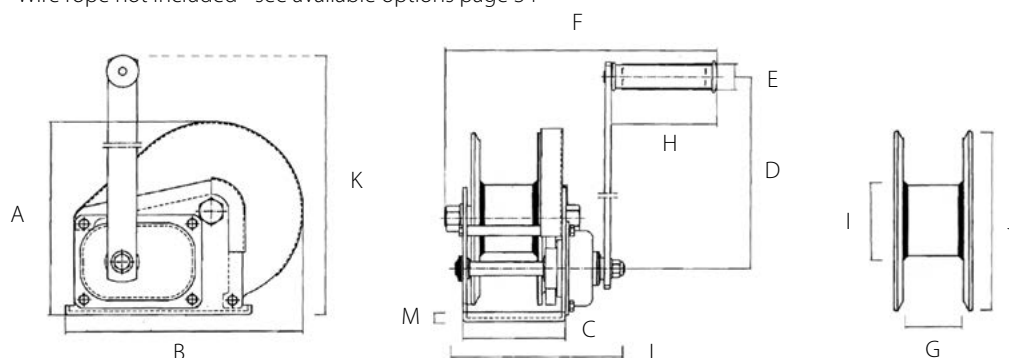

	OZ1000BW – OZ1000BWSS		OZ1500BW – OZ1500BWSS		OZ2000BW – OZ2000BWSS	
Capacity (lbs)		1000		1500		2000
Gear Ratio		4.2:1		5:1		10:1
Dimensions (in)	A	6.22		7.73		8.35
	B	7.20		9.36		11.10
	C	3.46		4.21		5.00
	D	8.26		12.68		12.99
	E	1.06		1.06		1.06
	F	10.43		10.63		11.81
	G	1.98		2.30		2.52
	H	4.29		4.29		4.29
	I	1.90BW – 1.60BWSS		2.38		3.00
	J	5.33		7.00		7.09
	K	10.20		15.31		15.35
	L	5.98		6.89		7.87
	M	0.12		0.14		0.16
Net Weight (lbs)	8		17		22	

Dimensions and illustrations are for reference only and subject to change without notice.



Carbon Steel
OZ1000BW



Standard - CE

Stainless Steel
OZ1000BWSS



Drill Drive Adapter



(OZ1000BWSS-LH)

