

ELECTRIC BUILDER'S HOIST



Features


- Lightweight and compact design for convenient mounting
- Automatic shut-off when rope reaches limit arm
- Dynamic and mechanical brake provides instant and safe braking
- Upper and lower limit switches for additional safety
- Sensor arm for motor shut-off to prevent reverse winding
- Galvanized wire rope with 360-degree weighted hook includes safety latch
- Quick release pendant and power cords
- Standard 115V power source-compatible
- Wireless remote control for ease of use (Model OBHW600 only)
- Emergency UP / DOWN control switch (Model OBHW600 only)
- Individual test certificate & serial number
- Wireless plug & play adapter available for OBH500 & OBH1000

Standards - CE

	OBH500	OBHW600	OBH1000
Capacity - Full Drum (lbs)	500	600	1000
Motor Voltage	115/1/60	115/1/60	115/1/60
Speed (fpm)	75	52	37
Motor (HP)	1.74	2	2.41
Motor KW	1300W/17.5A	1500W/12.5A	1800W/15.5A
Lifting Height (ft)	90	90	90
Wire Rope (in)	3/16	3/16	1/4
Net Weight* (lbs)	54	49	73
Power cord length (ft)	15	15	15
Pendant length (ft)	65	n/a	65
Full Load (AMPS)	17.5	12.5	15.5
Duty Cycle (min)	15 (25%)	15 (25%)	15 (25%)

*Includes lower hook, power and pendant cable / *Includes lower hook and power cable (OBHW600)
100 ft. pendant length available

500, 600, 1000 LBS

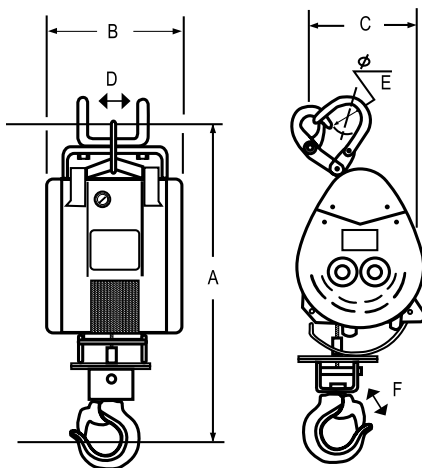

		OBH500	OBHW600	OBH1000
A (in)	Height	26.77	26.77	28.50
B (in)	Width	9.50	9.50	10.50
C (in)	Depth	7.88	9.06	12.00
D (in)	Hanger Inner Width	4.50	4.50	5.50
E (in)	Hanger Opening	2	2	2
F (in)	Hook Opening	1.62	1.62	1.50

Dimensions and illustrations are for reference only and subject to change without notice.



OBHW600

