



BEAM CLAMP

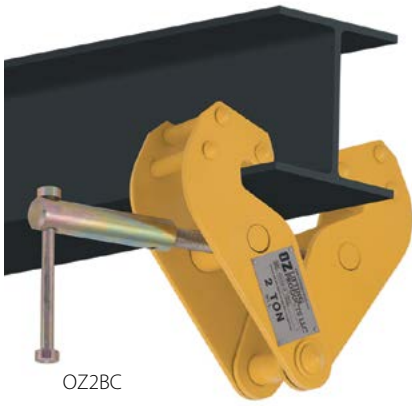

OZ2BC

Features

- Robust, all-steel construction
- Super-quick adjustment to fit most I-Beams (see measurements below)
- Durable baked-enamel paint protection
- Stainless steel ID tag
- Individual test certificate and serial number

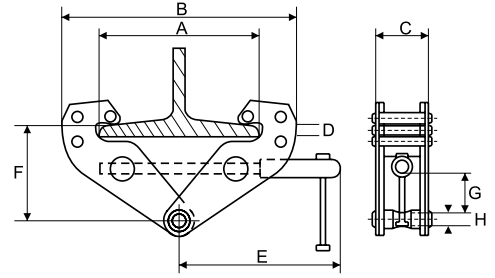

**Standards - CE,
ASME B30.16**

	OZ1BC	OZ2BC	OZ3BC	OZ5BC	OZ10BC
Capacity (tons)	1	2	3	5	10
Dimensions (in)	A	2.95-9.05	2.95-9.05	3.15-12.60	3.54-12.60
	B	14.96 max.	14.96 max.	18.50 max.	19.68 max.
	C	2.51	2.91	3.94	4.41
	D	.90	.90	1.57	1.57
	E	9.13	9.13	10.63	10.90
	F	3.54-5.90	3.54-5.90	5.71-8.66	5.71-8.66
	G	1.02	1.02	2.63	3.50
	H	.75	.87	.96	1.30
Net Weight (lbs)	9	11	21	25	35

Dimensions and illustrations are for reference only and subject to change without notice.




PUSH BEAM TROLLEY



Features

- Lightweight robust construction
- Fits most I, S, and W-Beams
- Durable baked enamel paint protection
- Precision ball bearing trolley wheels
- Anti-drop plate
- Stainless steel ID tag
- Individual test certificate and serial number

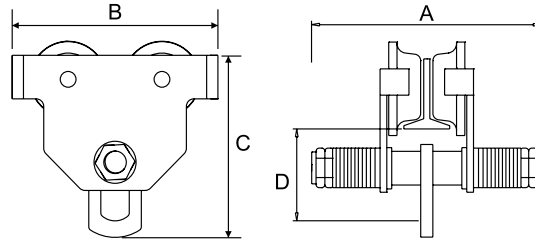

OZ1PBT

	OZ05PBT	OZ1PBT	OZ2PBT	OZ3PBT	OZ5PBT	OZ10PBT
Capacity (tons)	.5	1	2	3	5	10
Adjustable Flange Width (in)	2.52-8.00	2.52-8.00	3.46-12.00	4.00-12.00	4.49-12.00	4.95-12.00
Max Flange Thickness (in)	1.14	1.50	1.61	1.81	2.28	1.97
Product Dimensions (in)	A	12.25	12.75	17.50	17.31	18.87
	B	8.50	9.45	11.81	13.58	15.55
	C	7.67	8.41	11.26	13.23	15.47
	D	4.33	4.90	6.34	7.28	8.66
Minimum Radius Curve (ft)	2.95	3.28	3.60	4.26	4.59	5.57
Net Weight (lbs)	20	23	37	78	114	198
Ball Plns	1	1	1	1	1	2

**Standards - CE,
ASME B30.11, ASME B30.16**



See wheel and bail dimensions on page 18

Dimensions and illustrations are for reference only and subject to change without notice.

