


STAINLESS STEEL BEAM CLAMP



Features

- Stainless Steel Type 304 Construction for Corrosion Resistance
- Super-Quick Adjustment to most I-Beams
- Stainless Steel I.D. Tag
- Individual Test Certificate and Serial Number

Standards - CE, AS4991, ASME B30.16 (For use with manual or powered hoists)

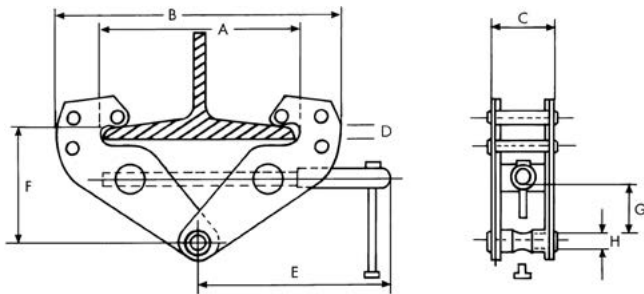

	OZSS1BC	OZSS2BC
Safe Working Load (tons)	1	2
A	2.95-9.05	2.95-9.05
B	12.2 max.	12.2 max.
C	2.6	3
Dimensions (in)		
D	.94	.94
E	7.68	7.68
F	5.12-6.57	5.12-6.57
G	1.57	1.57
H	.78	.9
Net Weight (lbs)	9	11




STAINLESS STEEL PUSH BEAM TROLLEY

Features

- Stainless Steel Type 304 Construction for Corrosion Resistance
- Fits to most I, S, and W-Beams
- Individual Test Certificate and Serial Number
- Anti-Drop Plate
- Stainless Steel ID Tag
- Precision Ball Bearing Trolley Wheels

Standards - CE, AS1418.2, ASME B30.11, ASME B30.16 (For use with manual or powered hoists)

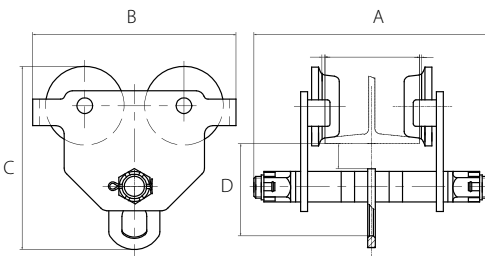

	OZSS05PBT	OZSS05PBT	OZSS1PBT	OZSS2PBT	OZSS3PBT*	OZSS5PBT*
Safe working load (tons)	0.25	0.5	1	2	3	5
Adjustable flange width (in)	2-6	2-6	2.5-8	3.5-8	4-6	4.5-6
Max flange thickness (in)	x	.06	1.06	1.06	1.10	1.14
Product dimensions (in)						
A	10	10	13	13.22	14.56	15.15
B	7.68	7.83	9.68	10.86	13.07	14.84
C	6.77	7.6	9	10.55	12.44	14.17
D	4	4	5	5.9	6.8	7.8
Minimum radius curve (ft)	3.2	2.62	3.28	3.60	4.26	4.59
Net weight (lbs)	7.72	18.7	26.5	43	64	97

* Push Beam Trolleys 3 Ton and 5 Ton available. Special order.

**8" flange width available upon request.



Stainless Steel Geared Beam Trolleys
.5 Ton – 5 Ton available. Special order.

