

| Project:  | AIA# |
|-----------|------|
| Item:     |      |
| Location: | SIS# |
| Approved: |      |

## P SERIES TOP MOUNT WARMING CABINET

PH1 Solid Door Warming Cabinet

MODEL: PH1-1S



7 Year Parts/Labor Warranty

### **CABINET CONSTRUCTION**

- Exterior stainless steel front and side (galvanized top, back and bottom)
- Interior is made of corrosion resistant aluminum
- · Stainless steel interior door liner
- · Full electronic control
- · 22 Gauge stainless steel door
- · Heavy-duty cylinder lock
- Operational indicator panel contains thermometer and adjustable thermostat control which is accurately calibrated from 80°F to 180°F
- Manually controlled humidity vents are provided in the top of the cabinet
- Self-closing door with 120° hold open feature, with cam-lift hinges
- Three (3) silver freeze shelves
- · One-piece, snap-in magnetic door gasket
- · Hinged front shroud
- · Proximity door switch activates interior incandescent lighting
- 8' Cord and plug (see electrical data for details)

## **OPTIONS & ACCESSORIES**

- · Pan slides
- · Stainless steel interior
- 3" or 6" Casters
- Left or right door hinge (at time of order)

### **ELECTRICAL SYSTEM**

- 15 AMP breaker required for single door units
- Strip type 750-watt heating elements, operating on 208-240/60/1, having a total of 1500 watts per compartment
- Externally mounted blower system maintains even temperature through out the food zone area






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



| MODEL                            | PH1-1S        |
|----------------------------------|---------------|
| EXTERNAL DIMENSIONAL DATA        |               |
| Width Overall                    | 26 ½"         |
| Depth Overall with Handle        | 34 3/4"       |
| Height Overall                   | 84 1/8"       |
| Number of Doors                  | 1             |
| Depth with Door Open 90°         | 57 ½"         |
| Door Opening (in)                | 21 ½" x 54 ¾" |
| INTERNAL DIMENSIONAL DATA        |               |
| NET Capacity (cubic ft.)         | 21.01         |
| Internal Width Overall (in)      | 22 ½"         |
| Internal Depth Overall (in)      | 26"           |
| Internal Height Overall (in)     | 56 %"         |
| Number of Shelves                | 3             |
| ELECTRICAL DATA                  |               |
| Amps                             | 5.9 / 6.8     |
| Cabinet Voltage                  | 208-240/60/1  |
| Heater Watts per section (@240V) | 1500          |
| Nema Plug (8' cord)              | 6-20P         |
| SHIPPING DATA                    |               |
| Gross Weight - Crated            | 320 lbs       |
| Height - Crated                  | 92"           |
| Width - Crated                   | 30"           |
| Depth - Crated                   | 38"           |

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

# Top Mount Warming Cabinet Reach-In Model: PH1-1S

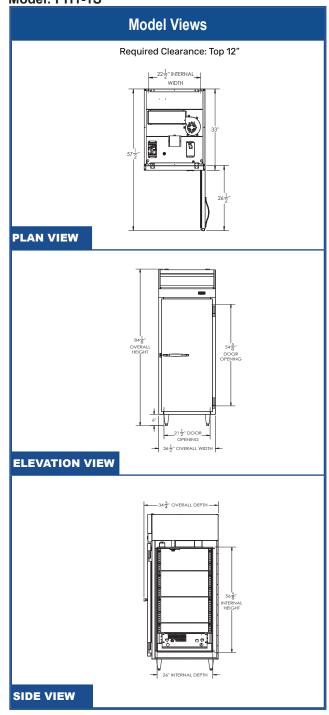







208-240/60/1 Unit pre-wired at factory and include 8' long cord and plug set.

