


Seven Zone 260 Watt Commercial Amplifier

PL260A 260W commercial amplifier

Features

- Seven front-selectable 70/25V speaker zones with selectable 70/25V switch
- 24 Volt input for emergency backup power
- Separate bass and treble controls
- Each XLR microphone input has a phantom power toggle
- Mic1 selectable priority paging

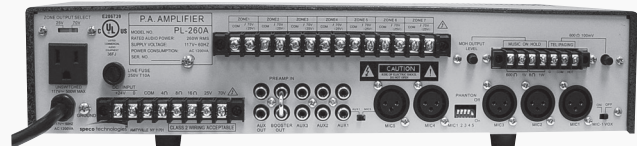

rear of unit

Specifications

RMS Output Power.....	260W
Max. Output Power.....	390W
AC Power Consumption....	1200W
Power Supply	AC 117V, 60Hz, DC 24V, 12A
Zones.....	7
Speaker Outputs.....	4/8/16 Ohms (non-zoned), 70/25V (zoned)
Other Outputs.....	Aux (Stereo RCA), Pre-Amp (RCA)
Inputs.....	5 x Mic (XLR), 3 x Aux (Stereo RCA), 1 x EQ/Mix (RCA), 1 x TEL (Terminal)
Frequency Response	50Hz ~ 15KHz (±3dB)
Tone Control	Bass ± 10 dB, Treble ± 10dB
THD	Less than 1% @1KHz
Signal/Noise Ratio.....	Microphone: >60dB, TEL: >60dB, Line: >70dB
Controls	Volume for each source, Master Volume, TEL Input Level, MoH Volume, Tone, Zone Selector, Phantom Power on/off
Telephone.....	TEL in and MoH Out
Indicators.....	Power, power level
Dimensions.....	16.9" (W) x 3.5" (H) x 11.6" (D)
Weight	29.2 lbs.
Listings	UL, cUL, CE, FCC, RoHS

NDAA
COMPLIANT

*Products are in compliance with NDAA Section 889 Part B Guidelines

Optional Accessory



PBMRK2
Rack Mounting Kit

Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 2/24/22