

PROW-18 Floor Model Proofer

Project _____

Item _____

Quantity _____



SIZE:

PROW-18 - 78-3/8" High, 25-1/8" Wide, 34-5/8" Deep
1991 mm High, 638 mm Wide, 880 mm Deep

NU-VU's **PROW-18** floor model proofer has a stainless steel construction and tempered glass doors for full view of your product. These units feature the AutoMist humidity system, which eliminates the need for a water pan; however, it does require a 1/4" waterline connection. This feature utilizes a mist, which is sprayed directly onto a fan that distributes the heat and humidity evenly throughout the proofer cavity.

The PROW-18 has a capacity of 18 full size pans or 36 half-size pans.

CONSTRUCTION:

- Welded stainless steel
- Fully insulated
- Control panel accessible through front and top of unit
- Heating elements accessible inside of cabinet and through top

CONTROLS:

- Mechanical controls
- Indicator light for thermostat
- Separate heat and humidity controls

LABORATORY CERTIFICATION AND APPROVAL



NU-VU® PROW-18 Floor Model Proofer

STANDARD FEATURES:

- Stainless steel construction
- Heavy duty 3" casters
- Full view tempered glass doors
- Silicone rubber door gaskets
- AutoMist humidity system

OPTIONAL FEATURES:


- Warmer
- Set of four 6" legs
- Solid Doors



NU-VU® Food Service Systems


www.nu-vu.com
5600 13th Street
Menominee, MI 49858

1-800-338-9886 Toll Free
1-906-863-4401 Phone
1-906-863-5889 Fax

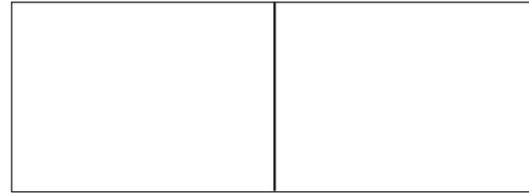

Approval / Stamp

PROW-18 Floor Model Proofer

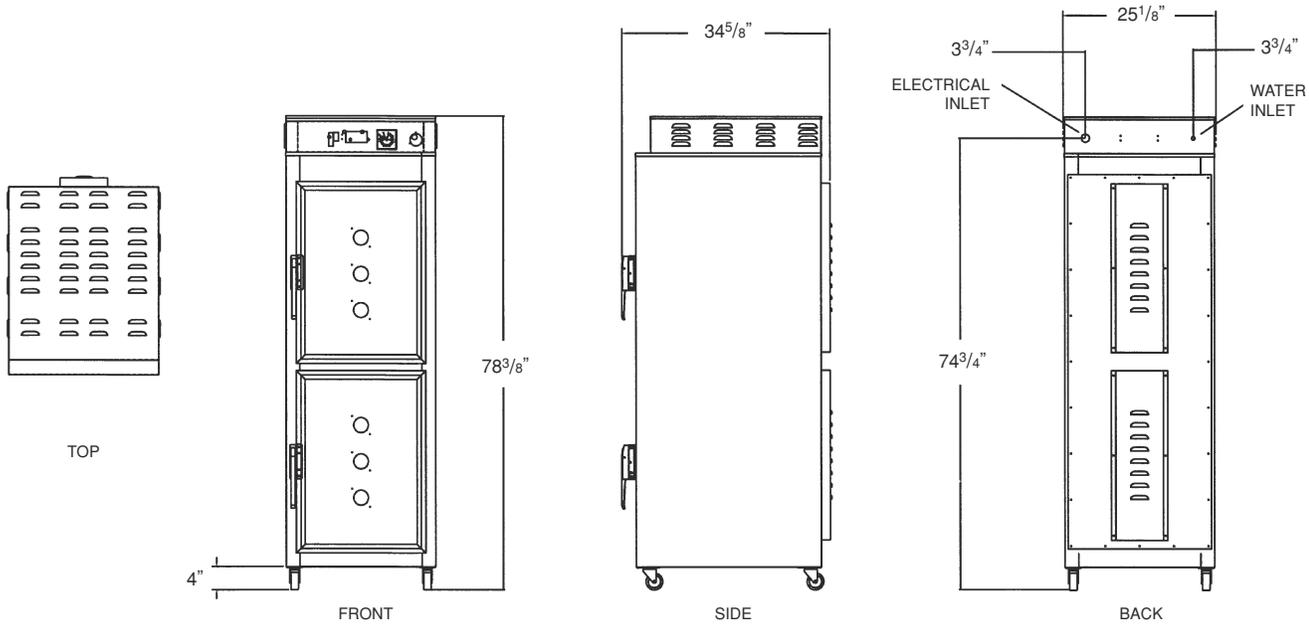

NU-VU® PROW-18 Floor Model Proofer

SPECIFICATIONS:

ELECTRICAL:

208 or 240 Volt single or three phase is standard.
(Please specify at time of order.)

SERVICE CONNECTIONS:

PROW-18 is shipped from factory to be hard wired on site.
Single phase uses three wire system.
Three phase uses four wire system.

ELECTRICAL:

Amp Draw	208/1	208/3	240/1	240/3
L1	12	10	11	9

WATER:

A 1/4" water line is required.

LISTINGS:

The PROW-18 has NSF and C-ETL-US listings.



INSTALLATION:

Allow four inches on each side and back of unit for ventilation of proofer.

CAPACITY:

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
Proofer	18	36	3"

DIMENSIONS:

	Height	Width	Depth
Exterior	78- ³ / ₈ "	25- ¹ / ₈ "	34- ⁵ / ₈ "
Interior	60"	18- ¹ / ₂ "	29"

DOOR SWING: Proofer - 24" (610 mm)

PACKING SIZE:

80" High, 36" Wide, 36" Deep
(2032 mm High, 914 mm Wide, 914 mm Deep)

SHIPPING WEIGHT:

400 Pounds, FOB Menominee, MI 49858