____ Date:



Regency Wall Mount Faucet with 8" Centers and 6" Swivel **Gooseneck Spout**

#600FW86G



Features

- 6" long x 9 3/8" tall swivel gooseneck spout, 2 GPM flow rate
- 8" centers, 1/2" NPT inlets
- Wall mounted base, attractive chrome-plated brass construction
- 140 degree maximum water temperature •
- Lever handle design

Certifications

1/2"










Technical Data

Spout Length	6 Inches
Faucet Height	9 3/8 Inches
Cartridge Type	Ceramic
Faucet Centers	8 Inches
Features	California AB100 Compliant NSF/ANSI 372 NSF/ANSI 61
Finish	Chrome
Flow Rate	2 GPM
Handle Type	Lever

Technical Data

Brass
Wall Mounted
5 9/16 Inches
Gooseneck
140 Degrees Fahrenheit
Faucets
1/2 Inches

Plan View

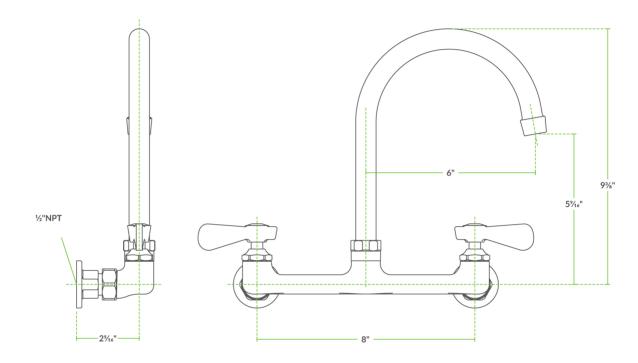

Notes & Details

This Regency wall mount faucet with 6" swivel gooseneck spout is an excellent choice when you need a reliable, affordable water fixture for your facility! Designed to be easy to install and easy to maintain, it's easy to see why Regency faucets are a great solution for any business. Thanks to a 6" long and 9 3/8" tall gooseneck spout, this faucet delivers water exactly where you need it, and the moveable swivel, high-clearance gooseneck design lets you move it to fill multi-compartment sinks or maneuver around larger cooking vessels.

Water exits the faucet with a 2 GPM flow rate, which creates a soft flow pattern with minimal splashing. The faucet installs on your wall or sink backsplash on a pair of 8" centers and connects to the facility water lines with a set of 1/2" NPT inlets. The faucet body is made from chrome-plated brass that complements nearly any design aesthetic, and the water flow is controlled by a pair of simple lever handles. An installation kit is required for setup (sold separately).

WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.