



Regency Wall Mount Hand Sink Faucet with 6" Swivel Gooseneck Spout

#600FWO6



Technical Data

Spout Length	6 Inches
Faucet Width	2 Inches
Faucet Height	9 3/16 Inches
Cartridge Type	Compression
Faucet Centers	Single
Features	California AB100 Compliant NSF/ANSI 372 NSF/ANSI 61
Finish	Chrome
Flow Rate	2 GPM

Features

- 6" long x 9 13/16" tall swivel gooseneck spout, 2 GPM flow rate
- Single hole 1/2" NPS female inlet
- Wall mounted base, attractive chrome-plated brass construction
- 140 degree maximum water temperature
- For use with knee or pedal valves (sold separately)

Certifications



NSF/ANSI 61 & 372



CSA, US and Canada



NSF Listed




1/2" Water Connection

1/2"

Technical Data

Material	Brass
Mounting Style	Wall Mounted
Spout Clearance	5 5/16 Inches
Spout Type	Gooseneck
Temperature Rating	140 Degrees Fahrenheit
Type	Wall Mount Spout
Valve Type	No Valve
Water Inlet Size	1/2 Inches


Plan View

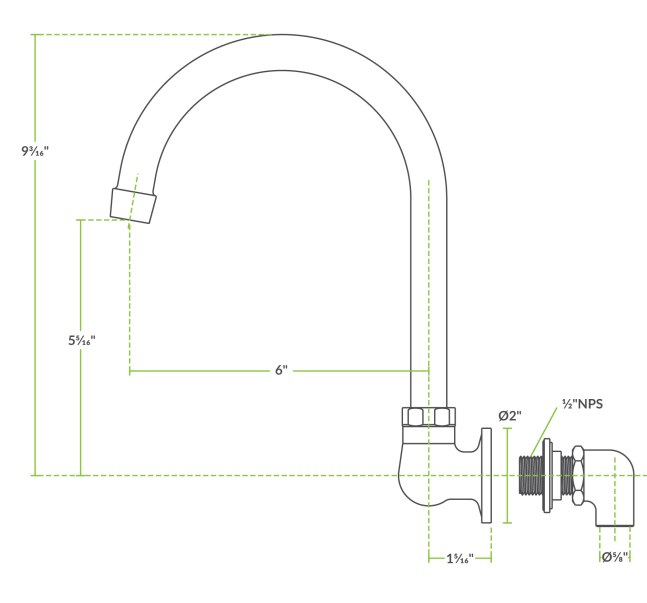

Notes & Details

This Regency wall mount hand sink faucet with 6" swivel gooseneck spout is an excellent choice when you need a reliable, affordable water fixture for your facility! Designed to be simple to install and maintain, this spout is great for use with knee or pedal valves (sold separately). Thanks to a 6" long swivel gooseneck spout with a single-hole 1/2" NPS female inlet, this faucet delivers water exactly where you need it.

Water exits the faucet with a 2 GPM flow rate, which creates a soft flow pattern with minimal splashing. The faucet installs on your wall and connects to the facility water lines with a 1/2" NPS female inlet. The faucet body is made from chrome-plated brass that complements nearly any design aesthetic. An installation kit is required for setup (sold separately).

 **WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.