



## Regency 50 lb. 25 GPM Grease Trap with 3" Non-Threaded Connections - Non-PDI Certified

#600GTNC25




### Technical Data

Length	27 1/8 Inches
Width	18 5/8 Inches
Height	17 1/4 Inches
Capacity	50 lb.
Connection Type	Non-Threaded
Flow Rate	25 GPM
Handle	With Handle
Inlet / Outlet Size	3 Inches
Material	Steel
Type	Grease Traps

### Features

- 25 GPM; 50 lb. capacity
- Includes external flow control fitting
- 3" non-threaded connections
- Steel construction with removable baffle
- Dual handles help to pull the lid off

## Plan View

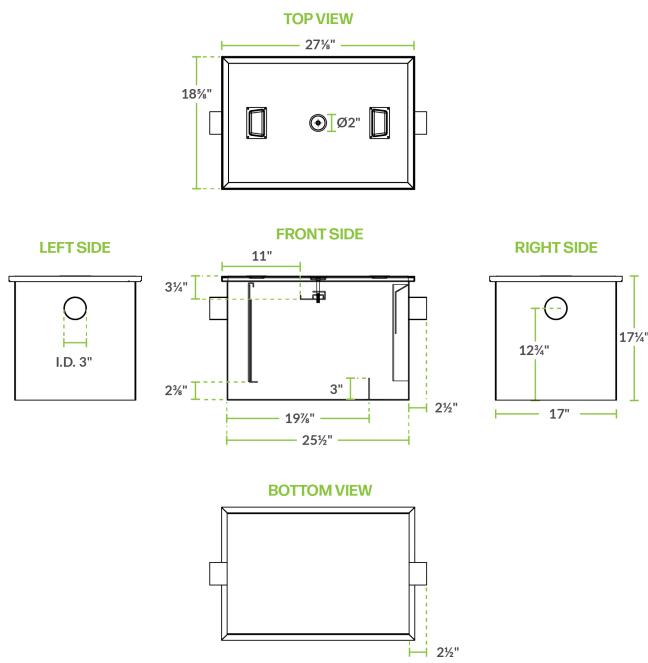

## Notes & Details

Use this Regency 25 GPM 50 lb. grease trap to keep your restaurant code-compliant and make it easy to remove harmful, greasy substances from drainage lines! The greasy byproducts that go down the drain of prep sinks, pot sinks, and commercial dishwashers are difficult to process and can cause environmental issues if they enter the sewer, septic field, or a nearby wastewater treatment facility. Local plumbing codes may require a grease trap on these and other appliances to prevent this from happening.

This trap has a grease capacity of 50 lb. and a flow rate of 25 GPM, with external flow control fitting and 3" non-threaded inlet / outlet connections to install it on your drain lines. Its steel construction and removable baffle make cleanout easy. The lid features two convenient pull handles to make accessing the trap interior easier. This grease trap is not PDI certified.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).