

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

RI REACH-IN REFRIGERATOR

RI18HC Half-Solid, Half-Glass Door Bottom Mount Refrigerator Hydrocarbon Series

MODEL: RI18HC-HGS



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- · Stainless steel exterior and interior
- Full electronic control
- Interior LED light
- Five (5) shelves standard
- · One piece grille
- Self-closing doors with 120° stay-open feature, on spring loaded hinges
- · Snap-in magnetic door gaskets
- 3" Heavy duty casters with two brakes standard

OPTIONS & ACCESSORIES

- · Epoxy shelves & clips
- 6" Casters or 6" legs optional
- · Wire shelf dividers
- · Right or left hinged door
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- · Epoxy coated evaporator coil
- Maintains temperature between 36° and 38°F





3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	RI18HC-HGS	
EXTERNAL DIMENSIONAL DATA		
Width Overall	27 1/4"	
Depth Overall with Handles	29 1/4"	
Height Overall	72 %"	
Number of Doors	2	
Depth with Door Open 90°	52 ¹³ ⁄16"	
Door Openings (in)	24" x 24 ¾"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	16.85	
Internal Width Overall (in)	24 1/4"	
Internal Depth Overall (in)	23 %"	
Internal Height Overall (in)	Max 53" Min 46 ‰"	
Number of Shelves	5	
ELECTRICAL DATA		
Full Load Amperes	5.5	
Voltage	115/60/1	
Nema PLug (8' cord)	5-15P	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1997	
Heat Rejection (BTU/Hr)	2995.5	
Charge (lbs/grams/ounce)	0.1875 / 85 / 3.0	
SHIPPING DATA		
Gross Weight (crated lbs)	334 lbs	
Height - Crated	75"	
Width - Crated	30"	
Depth - Crated	32"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4°. Metric dimensions (MM).

Bottom Mount Reach-In: Half-Solid, Half-Glass Door Model: RI18HC-HGS

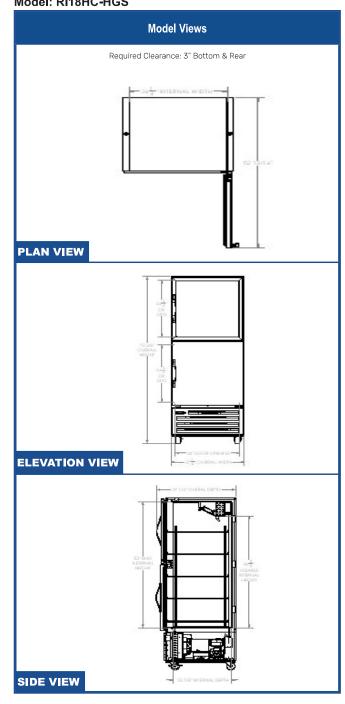



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 10.7' long cord and plug set.

