SANI-LAV FRODUCTS

5-Person Hands-Free Floor Mount Stainless Steel Wash Station

Model	Flow-Rate		
510FK1	Standard 2.0 GPM		
510FK1.5	Low-Flow 0.5 GPM		

Product Specifications

Constructed from welded #16 gauge type 304 stainless steel. The front, bottom and back are formed from a single sheet with a rolled rim on front and sides. Exposed surfaces have a blended uniform satin finish. Specially designed knee valves provide easy access to working parts without disconnecting mount or plumbing.

Outside Dimensions	100" x 20" x 45" High
Inside Bowl Size	97" x 16-1/2" x 8" Deep
Back Splash Height	10"
Water Activation	Single Knee Pedal Valve
Flow Rate	2 GPM
Inlet Connections	3/8" Male Compression
Drain Opening	2"
Finish	Satin
Strainer	1-1/2" Dia. Duo Basket Strainer

Includes

- (1) Floor mount wash station
- (1) Leg assembly set
- (8) Washers and nuts for connection sink to leg assembly set
- (5) Single knee pedal valve (bottom mount) with 4 nuts
- (5) Swivel gooseneck spout with aerator
- (5) Connecting tube for valve to spout connection
- (10) Fittings, brass, 0.375" male compression and 0.375" male NPT
- (5) Mixing check valve
- (3) Strainer assembly with basket

Product Compliance

NSF/ANSI 2 Food Equipment NSF/ANSI 372 Low-Lead



			And the state of t
SS			1




Part:	_ Quantity:
Project:	
Contact:	
Date:	
Approval:	


Notes:


. . .




5-Person Hands-Free Floor Mount Stainless Steel Wash Station Models 510FK1 and 510FK1.5

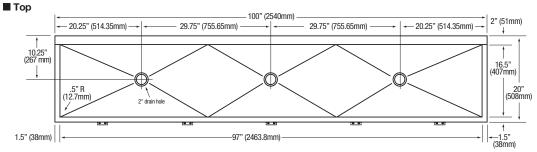

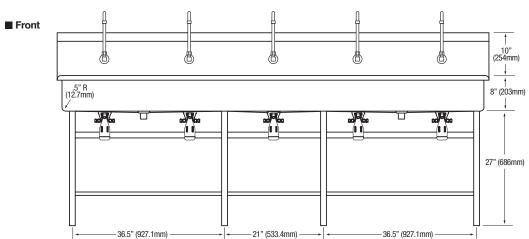



■ Hole Configurations

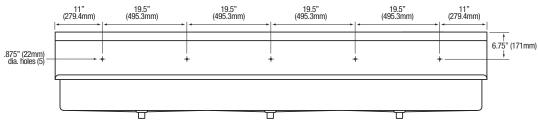

■ Floor Mounting Detail

■ Supply Line Detail

