



3-Person Hands-Free Floor Mount Stainless Steel Wash Station

Model	Flow-Rate
56FK2	Standard 2.0 GPM
56FK2.5	Low-Flow 0.5 GPM

Product Specifications

Constructed from welded #16 gauge type 304 stainless steel. The front, bottom and back are formed from a single sheet with a rolled rim on front and sides. Exposed surfaces have a blended uniform satin finish. Specially designed knee valves provide easy access to working parts without disconnecting mount or plumbing.

Outside Dimensions	60" x 20" x 45" High
Inside Bowl Size	57" x 16-1/2" x 8" Deep
Back Splash Height	10"
Water Activation	Double Knee Pedal Valve
Flow Rate	2 GPM
Inlet Connections	3/8" Male Compression
Drain Opening	2"
Finish	Satin
Strainer	1-1/2" Dia. Duo Basket Strainer

Includes

- (1) Floor mount wash station
- (1) Leg assembly set
- (4) Washers and nuts for connection sink to leg assembly set
- (3) Double knee pedal valve (bottom mount) with 4 nuts
- (3) Swivel gooseneck spout with aerator
- (3) Connecting tube for valve to spout connection
- (6) Fittings, brass, 0.375" male compression and 0.375" male NPT
- (3) Mixing check valve
- (1) Strainer assembly with basket

Product Compliance

NSF/ANSI 2 Food Equipment
NSF/ANSI 372 Low-Lead



Part: _____ Quantity: _____

Project: _____

Contact: _____

Date: _____

Approval: _____

Notes:




WARNING: Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

COLUMBIA PRODUCTS
800.626.2117 • columbiasinks.com • info@columbiasinks.com


©2021 Columbia Products

3-Person Hands-Free Floor Mount Stainless Steel Wash Station
Models 56FK2 and 56FK2.5


Top

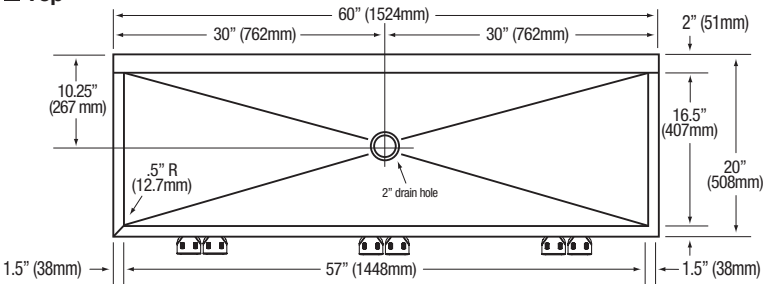


Front

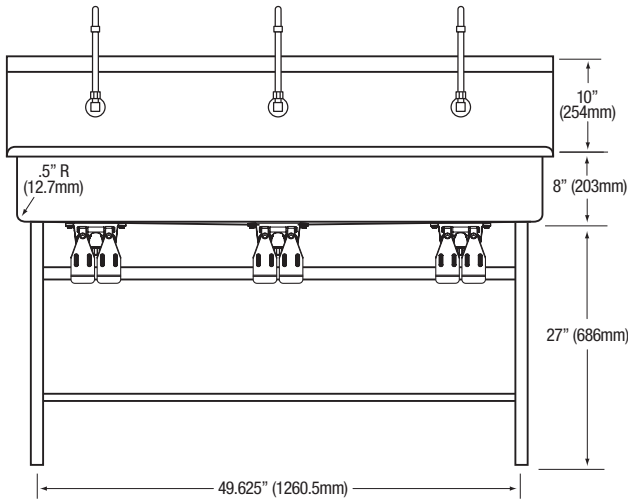


Side

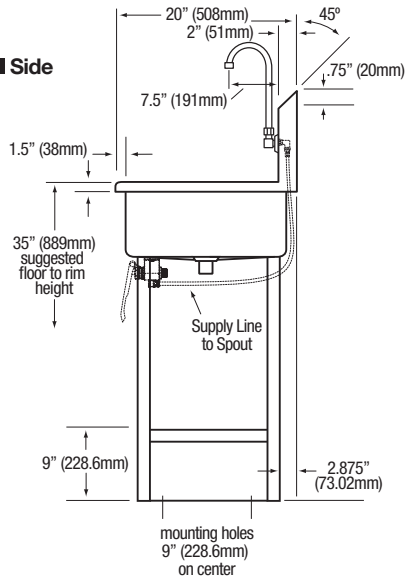

Hole Configurations

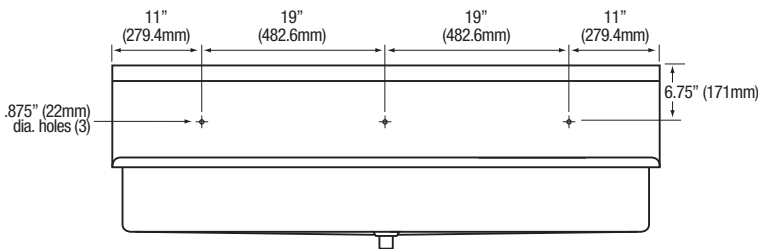

Floor Mounting Detail



Supply Line Detail

