

# KATANA 6 - KATANA 12 PTO - KATANA 20 VV

## Horizontal bowl cutters



KATANA 6



KATANA 12 PTO

- Designed for high volume production, the Katana series provides homogeneous product texture
- Continuous feed of meats, cheese, salads, dips, spreads, breads and emulsified sausage batters
- Stainless steel AISI 304 construction, for durable long life
- Cutlery grade 3-blade hub to efficiently decrease processing time for faster results, 5000 cuts per minute
- 3-blade Hub driven by powerful ventilated asynchronous motor at 1680 rpm
- Removable bowl cover, 3-blade hub and bowl without tools, for easy cleaning and thorough sanitation.
- Maximum protection against liquid infiltration on the shaft
- Rubber feet
- Bowl cover safety interlock
- Thermal overload motor protection
- ON/OFF s/steel keypad, IP 67 waterproof.  
No voltage release

### KATANA 12 PTO

- comes standard with PTO hub

### Optional

- Triple serrated blades hub
- Triple unsharpened blades hub

### Specifications

#### Construction:

##### Electrical Katana 6:

##### Electrical Katana 12:

##### Electrical Katana 20:

#### Plug & Cord:

Stainless steel body

120V AC, 60Hz, single-phase, 6.8A - 1 HP

120V AC, 60Hz, single-phase, 12.6A - 2 HP

220V AC, 60Hz, single-phase, 7A - 3,25 HP

Attached plug, flexible, 6' long cord.

3 wire SJT 18 AWG, NEMA 5-15 P (Katana 6)

3 wire SJT 14 AWG, NEMA 5-15 P (Katana 12)

#### Controls:

ON/OFF stainless steel keypad. IP 67 waterproof.

No voltage release.



Certified to UL Standard 763 and NSF Standard 08  
 Certified to CSA Standard C22.2  
**KATANA 6 - 12**



NSF Standard 08  
**KATANA 20**

Food processors



**STANDARD**  
 Hub with 3 blades



**OPTIONAL**  
 Hub with 3 serrated blades



**OPTIONAL**  
 Hub with 3 unsharpened  
 beating blades




**OPTIONAL**  
 Hub with 3 smooth edge



Optional thermometer on lid



Removable bowl cover, 3-blade hub and bowl without tools,  
 for easy cleaning and thorough sanitation

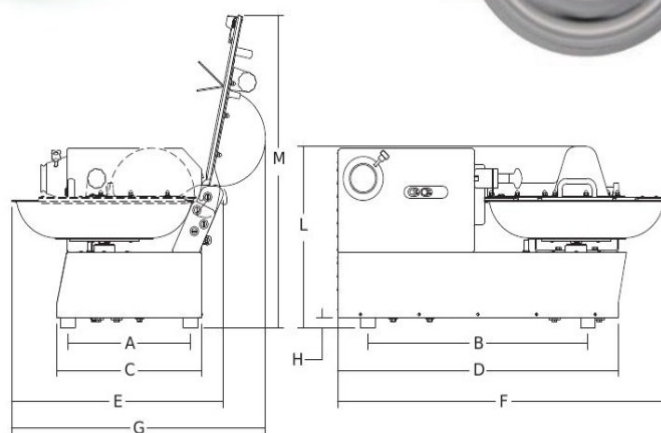

|                      | Power     | Power source               | Bowl capacity | 3-blade hub rotation | A                    | B                    | C                    | D                    | E                   | F                  | G                    | H                 | L                    | M                    | Net weight | Shipping                                                     | Gross weight |
|----------------------|-----------|----------------------------|---------------|----------------------|----------------------|----------------------|----------------------|----------------------|---------------------|--------------------|----------------------|-------------------|----------------------|----------------------|------------|--------------------------------------------------------------|--------------|
|                      | watt/Hp   |                            | lb            | r.p.m.               | inch.                | inch.                | inch.                | inch.                | inch.               | inch.              | inch.                | inch.             | inch.                | inch.                | lbs.       | inch.                                                        | lbs.         |
| <b>KATANA 6</b>      | 750/1     | 120V AC, 60Hz, 6.8 A       | 10            | 1.680                | 11 <sup>3/4"</sup>   | 21 <sup>1/4"</sup>   | 14"                  | 28"                  | 20 <sup>1/3"</sup>  | 32 <sup>3/4"</sup> | 23"                  | 3 <sup>5/8"</sup> | 18 <sup>5/8"</sup>   | 30"                  | 134        | 32" x 48" x 34"                                              | 220          |
| <b>KATANA 12 PTO</b> | 1400/2    | 120V AC, 60Hz, 12.6 A      | 20            | 1.680                | 13 <sup>3/16"</sup>  | 23 <sup>5/8"</sup>   | 15 <sup>1/2"</sup>   | 29 <sup>13/16"</sup> | 23 <sup>1/8"</sup>  | 35 <sup>1/2"</sup> | 26 <sup>3/4"</sup>   | 3 <sup>5/8"</sup> | 20"                  | 33 <sup>1/2"</sup>   | 156        | 32" x 48" x 34"                                              | 240          |
| <b>KATANA 20 VV</b>  | 2387/3.25 | 220V AC, 60Hz, 7 A +/- 10% | 33            | 600/2.600            | 15 <sup>23/64"</sup> | 25 <sup>19/32"</sup> | 17 <sup>23/32"</sup> | 32 <sup>9/32"</sup>  | 27 <sup>9/16"</sup> | 39 <sup>7/8"</sup> | 32 <sup>23/64"</sup> | 3 <sup>5/8"</sup> | 19 <sup>61/64"</sup> | 37 <sup>13/64"</sup> | 203        | 39 <sup>3/8"</sup> x 47 <sup>1/4"</sup> x 31 <sup>1/2"</sup> | 287          |



SIRMAN USA, Inc. 1500-1514 West Wrightwood Court, Addison, IL 60101 U.S.A.

Phone: +1 847-288-9500  
 Toll free: 866-643-6872

sirmanusa@sirman.com  
 www.sirman.com