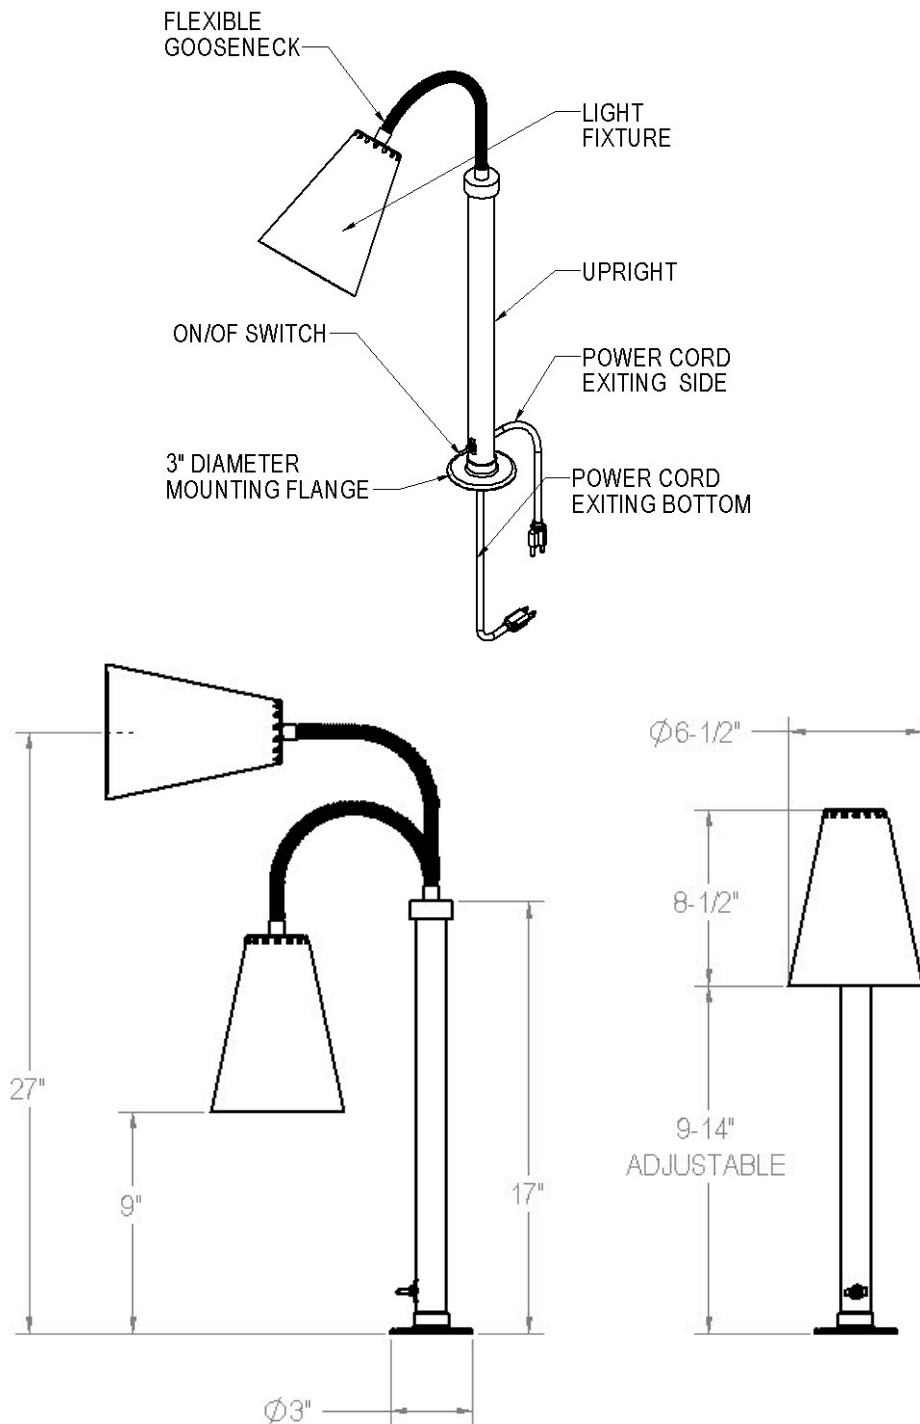




**SL-FM-ST**

## **SINGLE BULB STREAMLINED HEAT LAMP FOR MOUNTING**











## SL-FM-ST

### SINGLE BULB STREAMLINED HEAT LAMP FOR MOUNTING

**Description:** Single mounted heat lamp. Available in (6) distinct lamp shades and in (6) unique finishes. 3" diameter mounting flange with bolts attached. Lamps are made from Stainless Steel, Aluminum and Brass. All finishes are non-tarnishing, require no polishing and are easy to clean. All internal components including lamp sockets and wiring are high temperature rated (392°F/200°C).

Standard Models					
Model Number	Description				
SL-FM-ST	Single bulb streamline style heat lamp for customer mounting				
Available Finishes: Black, Stainless Steel, Chrome, Smoked Copper, Brass, Bright Copper					
Shade Styles					
					
200	300	500	600	700	900
5-1/2" X 7-1/2" Diameter X Length 140 mm X 191 mm	7-1/8" X 7-1/2" Diameter X Length 181 mm X 191 mm	7-1/4" X 7-3/8" Diameter X Length 184 mm X 187 mm	6-1/2" X 8" Diameter X Length 165 mm X 203 mm	7" X 8" Diameter X Length 178 mm X 203 mm	6-1/2" X 8-1/2" Diameter X Length 165 mm X 216 mm
<b>Note:</b> Please specify power cord location, through side of upright or through bottom of post					
Specifications					
Mechanical					
Light head material	Aluminum				
Light head	Varies depending on which model chosen. See shade styles				
Light head height from mounting surface	Adjustable 10-15"				
Upright and all fittings	Stainless Steel				
Base Size	N/A				
Shipping weight	10 lbs.				
Internal wiring	16 AWG Silver coated with Teflon insulation. Rated (200° C)				
Lamp socket	Glazed porcelain/nickel. Rated (200° C)				
Switches	On/Off rated 15 amps @ 115 VAC				



## SL-FM-ST

### SINGLE BULB STREAMLINED HEAT LAMP FOR MOUNTING

Power cord	120 VAC-18 gauge 3 conductor cable 84" long with Nema 5-15P plug (standard) 240 VAC-18 gauge 3 conductor harmonized cable 84" long with Schuko plug (standard).
<b>Electrical</b>	
Operating Voltage (Domestic)	120 volts 60 Hertz single phase
Operating Voltage (International)	240 volts 50 Hertz single phase
Power	250 watts Maximum
Operating amperage	2.5 amps (120 VAC) 1.25 amps (240 VAC)
Bulb type	Infrared 250 watts maximum, shatterproof design