



SlowStop® 4" Handicap Parking Bollard (SS4Y-42-HC)

MASS (LBS)	1000	2000	3000	4000	5000	7500	10000	12500	15000
SPEED (MPH)									
1.0									
1.5									
2.0									
2.5									
3.0									
3.5									
4.0									
4.5									
5.0									
5.5									
6.0									
6.5									

No Damage / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is under-sized


Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 4" (3.5" ANSI Schedule 40 or Equiv.)


Bollard Height: 42"

Sign Height: 60" above ground (ADA)

Set Screws: 5 M16 x 2.00
8mm Hex

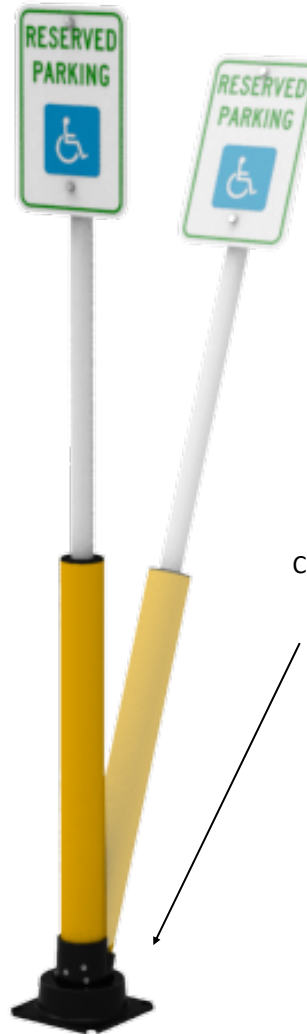

Installs with four (4)
5/8" x 5-1/2"
Concrete Screw Anchors
(included)



SPECIFICATIONS

- Stopping Power: 5,334 joules / 3,934 ft-lb
- No-Damage Rating: 2,667 joules / 1,967 ft-lb.
- Meets IBC 1607.8.3 requirements to resist 6,000 pounds of force at 27" height
- Temperature Rating: -40°
- Engineer grade reflective sheeting on HDPE sign face
- Aluminum post and brackets included
- Available with Van Accessible placard (SS4Y-42-VA) or no placard (SS4Y-42-SP)

RECOMMENDED USES

- Parking lot handicap parking spots
- Sign face can be changed for alternate uses
- Post-tensioned Concrete
- For use without costly wheel stops
- Avoiding trip hazards in pedestrian travel lanes



4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
©2021 SlowStop. All rights reserved.