## /// 6455-C

## Frozen Beverage Machine

115V - Gravity Feed Refrigerated Hopper Pre-Chills Mix



(2) 4 Quart Cylinders - (2) 8.5 Quart Hoppers

Perfect for alcoholic and non-alcoholic frozen beverages in bars and restaurants.



### Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

#### Reduced Parts - Easy Cleaning

Reduced parts and single piece beater/shaft design improve cleaning time and operational experience.

## Simple Control, Easy Operation

Simple and intuitive control system makes operation and viscosity adjustment easy, swift and more precise

#### Low Mix Indicator & Freeze Protection

Light turns "ON" at low mix to alert operator to add mix. Prevents Freeze Ups when mix is out.

## Refrigerated Hoppers, Standby, and Indicator

Maintains product temperature in mix hopper overnight and improves freeze and recovery time. Indicator lights for standby/night mode.

## Safety Protections & Light Box Merchandising

High pressure switch prevents compressor overheating. Thermal overload protects motor and drive train. Illuminated flavor cards to attract more business

## Self-closing Dispensing Valve

Automatically prevents product overflow after dispense



## +

## **The Spaceman Difference**

#### QUALITY

## **Affordable Quality**

## Designed by Aerospace Engineers

- ✓ Craft quality design, less investment
- ✓ Built to last
- ✓ Luxurious mouthfeel

#### VALUE

## **Microcrystal Technology**

### **3X Patented Freezing Speed**

- ✓ Superior fast freeze
- ✓ Quick recovery
- ✓ Lowest energy cost per serving

#### SERVICE

## **Restriction-Free Service**

### Service on Your Terms


- No binding contracts
- No locked-in maintenance fees
- No monthly equipment costs






# /// 6455-C

# Frozen Beverage Machine

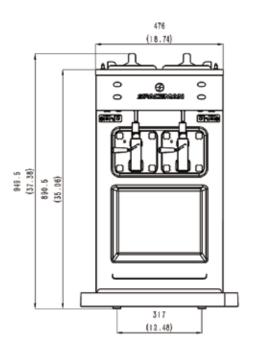

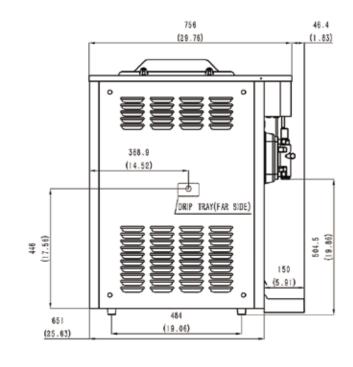

## **Specifications**

Flavors	2
Freezing Cylinders	2 x 3.8L / 4.0qt
Mix Hoppers	2 x 8.0L / 8.5qt
Output Capacity (10oz)	190 serves/hr
Clearance Requirements	152mm/6"

Weight	Kg/lb	
Net	146/ 325	
Shipping	166/369	
Volume	0.48 CBM / 17.10 CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	476/18.7	520/20.5
Depth	651/ 25.6	853/33.6
Height	950/37.4	1090/ 42.9

Electrical	FLA	Power(kW)	Plug
110-120/60/1	10	1.0	5-20P

## **Features**

Control System	Single, Mechanical
Auto Closing Dispensing Valve	<b>~</b>
Low Mix Indicator Light	<b>~</b>
High Pressure Protection	<b>~</b>
Thermal Overload Protection	<b>~</b>
Refrigerated Hoppers	<b>~</b>
Standby Mode	<b>~</b>
Indicated Lights	<b>~</b>
Low Mix Freeze Protection	<b>~</b>

## **Options**

Air Discharge Chute	<b>✓</b>
Water Cooled	<b>~</b>

<sup>\*</sup>Above specifications are subject to change without notice