

PROJECT NAME: \_\_\_\_\_

LOCATION: \_\_\_\_\_

SPECIFIER ITEM NO. \_\_\_\_\_ QTY: \_\_\_\_\_

ENCORE PART NO. \_\_\_\_\_


## Encore<sup>®</sup> Dipperwell Faucet KL22-3100 Series

KL22-3100

No Flow Restrictor

KL22-3100-SB

With Flow Restrictor

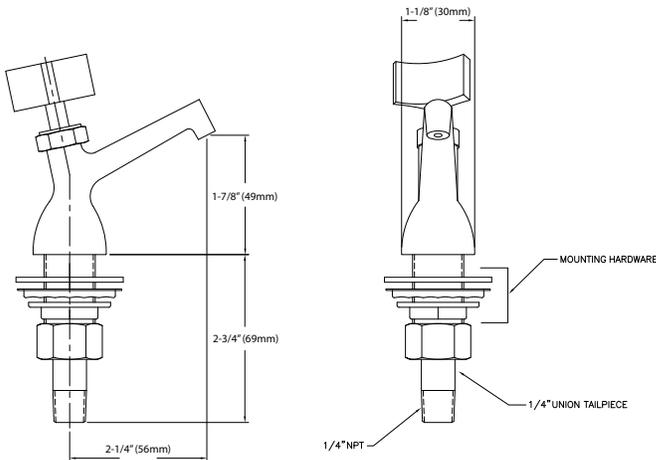

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole for deck is recommended to accommodate 1/2" supply nipple.

1/2" NPSM Male Inlet

Operating Temp: 40 - 180°F (5 - 83°C)

Operating Pressure: 20 - 125psi

Approximate shipping weight - 1 lb

Warranty - 2 years parts

Heavy duty faucet is specification and commercial quality

### Environmentally friendly, water efficient

- Low lead brass body and valve components
- Available with flow restrictor for greater water and energy savings

### SPECIFICATIONS:

Deck Mount Dipperwell Faucet to be Encore KL22-3100 Series in the following configuration:

\_\_\_\_ KL22-3100                      1.33gpm @ 45psi

\_\_\_\_ KL22-3100-SB                  .4gpm @ 45psi

Faucet body to be constructed of polished chrome plated brass. Handles to be solid unbreakable chrome plated hardware. Faucet to be furnished with 1/4" union tailpiece and mounting hardware.