IMMERSION CIRCULATOR SMARTVIDE XL

Maximum capacity: 120 lt./30 gal.





retherming very cold or frozen food.

- ✓ Increases profits due to lack of product shrink. Requires very little hands-on time, allowing the Chef to do other tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest. The interactive full-color touchscreen offers all information at a glance and makes operation extremely intuitive. In addition, thanks to the connectivity, an exchange of important data is allowed to improve the performance of the Chef.
- SmartVide XL offers a complete settings menu, accessible through its touch screen.
- Portable: thanks to their thick, stainless steel, ergonomic handle, SmartVide can be taken from a container to another easily.
- √ HACCP-ready: thanks to Bluetooth connectivity, it is possible to export or print cooking results at the end of each cycle. Furthermore, the cooking data be consulted on the interactive touch screen at any time during the cycle.
- ✓ Your appliance, always updated: free firmware update, no matter where the appliance is with no need of additional appliances.

Commercial high-precision sous-vide cooker. Reliable, user-friendly, portable.

Interchangeable between °C and °F."

- Bluetooth / WIFI connectivity.
- HACCP-ready.

SALES DESCRIPTION

- Optional core probe and temperature control by core probe.
- Firmware update.
- 5" colour touch screen.

Portable precision cooker with stirrer for up to 120 lt. / 30 gal. containers. Deisgned for chefs, developed with chefs.

- √ The thick stainless steel, robust construction guarantees commercial performance.
- SmartVide guarantees cooking at a precisely controlled temperature while preserving the quality of the product, enhancing flavor and texture. Equipped with a highly precise temperature control system to obtain extremely consistent results.
- The optional core probe allows for an even more precise control when standardizing recipes. Recipes can be set and the SmartVide controlled by the core probe temperature.
- Allows cooking food in their own juice and using this juice immediately after cooking to enhance flavors.
- Marinates and macerates an ingredient in half the time.
- Infuses and flavors oil, fat or other products applying the controlled temperature technique.
- The possibility of probe activated cycle start is a crucial function for pasteurization.
- The possibility of connecting SmartVide XL to an enhanced tank reduces heating time. This function is specially useful when cooking or

INCLUDES

√ Janby Track Mini (must be)

activated).

OPTIONAL

- Core probe.
- Insulated tanks.
- Heated tanks.
- Lids for insulated tanks.
- Floating balls.
- ☐ Janby Track (available through janby.kitchen).

Accessories

- □ Heated tank for SmartVide X
- ☐ Heated tank for SmartVide XL
- ☐ Baskets for 120P heated tank

SPECIFICATIONS

Temperature

Display precision: 0.1 °F Range: 41 °F - 203 °F

Permissible ambient temperature: 41 °F - 104 °F

Time

Resolution: 1 '

Cycle duration: 1 ' - 99 h

General features

Maximum recipient capacity: 30 gal Total loading: -- Hp (120V) / 3.5 Hp (208V)

Submergible part dimensions: 4.6 " x 4.3 " x 7.8 " External dimensions (WxDxH): 4.92 " x 5.82 " x 17.1 "

Net weight: 14.7 lbs

AVAILABLE MODELS

1180402 Immersion Circulator SmartVide XL 208-240/50-60/1

1180400 SmartVide XL 230/50-60/1

1180406 SmartVide XL 230/50-60/1 AUS

* Ask for special versions availability







FOOD PRESERVATION AND SOUS-VIDE

IMMERSION CIRCULATOR SMARTVIDE XL

Maximum capacity: 120 lt./ 30 gal.



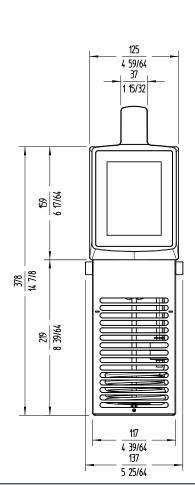

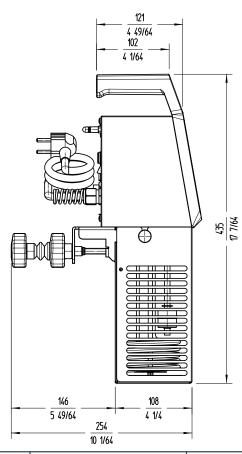

Sammic | www.sammic.us Food Service Equiment Manufacturer

usa@sammic.com 1225 Hartrey Avenue 60202-1056 Evanston, IL phone +1 (224) 307-2232 toll free +1 844 275 3848



Project	Date
Item	Qty

Approved