

31" PLATFORM GLASS RINSER

- Add European style while creating dispense excitement
- Condition the glass before pouring invert glass, push down on sprayer for cold water rinsing
- Draft tower mounts directly to platform tray eliminating coring of counter top
- Robust 18 gauge stainless steel module with full plywood under support



DP-1606Brushed Stainless Steel



www.micromatic.com • 1 (866) 327-4159

31" PLATFORM GLASS RINSER

Job Number: Location:






Part No.	Description	Shipping Weight
□ DP-1606	Brushed stainless steel	6 kg
		14 lbs

Rinser Water Inlet Installation

- Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply (no greater, perfect operating pressure).
- Install in-line one way check valve from the street water supply (prevents pressure drop which can cause leaking).
- Install in-line shutoff for the rinser system from the street water supply (this must be turned off nightly).
- If teed into soda system make sure system can handle the increased water demand. Have plumber install a 45° 1/2" O.D. barb for the drains if line is not hard plumbed into the system.
- Install a shutoff for the rinser water supply if line is not hard plumbed into the system.

Dimensions

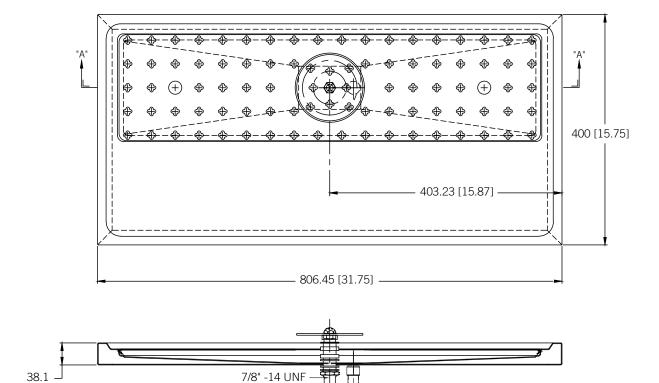



Toll-Free: 1-866-327-4159 www.micromatic.com

[1.50]

West

19791 Bahama St. Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844

Central

1/2" BSP

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363

Southeast

Drain: Threaded Brass 5/8" -18 UNF X 3 1/2" LONG

0.53" O.D.

15111 Dispense Ln. Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429

Northeast

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466