REMOTE POWER PACK - AIR COOLED



PREMIUM - 3 PUMP - 5,100 BTUs

- Engineered by beer-industry experts for performance and value.
- Digital thermostat for accurate glycol bath temperature.
- Expanded urethane foam insulates cabinet to maintain glycol temperature and minimize condensation.
- Exterior sight glass to verify glycol bath level.
- Anti-vibration pads reduce motor noise.
- Remote condenser for accessibility.
- Fan control switch and crank case heater included.
- Pump down refrigeration system.







Glycol Bath, Pumps & Motors (cover included)



^{*}Units manufactured prior to 2/1/2022 were produced with a 6-15P plug.



www.micromatic.com • 1 (866) 327-4159 3/4 HP COMPRESSOR

Job Number:______ Location:



Part No.	Description	Shipping Weight
	Remote condenser, air cooled power pack, 3 pump and motor	80 kg
□ WIWIFF45U5-FKG-5	Remote condenser, air cooled power pack, 5 pump and motor	175 lbs

Operating Performance

Compressor	3/4 HP
BTU per hour	5,100
Plug Type (NEMA #)	6-20P*
Cord Length	81
Voltage	208/230
Body Amps / Unit Amps	3 / 6.5

Refrigerant	R-134a	
Charge	TBD	
Refrigerant Running Pressure	18 (low) 140 (high)	
Bath Capacity	43.5 litre (11.5 gallons)	
Pump Type	Rotary Vane	
Push In Connector	12.7mm (1/2") O.D.	


Dimensions


REMOTE CONDENSING UNIT

Remote Power Packs must be installed by a qualified refrigeration technician, copper line set, drier, sight glass and refrigerant must be provided by installer. The condensing unit needs to be hard wired and the bath has a cord and plug.


Maximum distance from bath to compressor is 50 ft.

CONDENSING UNIT DIMENSIONS WITH COVER				
L	W	Н		
23.75	17.25	18.5		





GLYCOL BATH, PUMPS & MOTORS

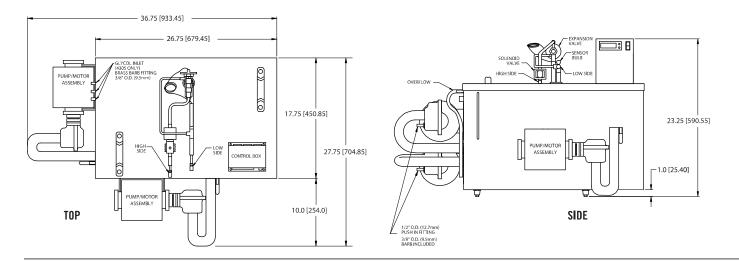



Toll-Free: 1-866-327-4159 www.micromatic.com

West

19791 Bahama St. Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844

Central

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557

Southeast

2386 Simon Ct. Brooksville, FL 34604 Tel. (352) 799-6331

Northeast

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466

^{*}Units manufactured prior to 2/1/2022 were produced with a 6-15P plug.