

## Technical Data

Bottom (A)
Outter rim (B)
Height (C)
Mold Weight
Basis Weight
Heat resistance

	Tolerance		
57 mm	± 1 mm		
93 mm	± 1 mm		
38 mm	± 1 mm		
3.8 g	± 5 %		
170 gsm	± 5 %		
390° F max			

### N9J08185



### Characteristics

Paper board stock

Pure bleached paper board printed on both sides in PMS color 476 C Brown. Ink is resistant to heat and alcohol up to the recommended maximum baking temp of 390 degrees F. Inner surface of mold is laminated with PET, 7 microns in thickness.

FDA Kosher Country of origin Baking mold is manufactured in compliance with 21 CFR 176.170 and 176.180.

Certified by KOF-K Supervision of Teaneck, New Jersey. USA

Additional specification documents available upon request.

### Packaging and Storage

Case	_23.5 in x 18 in x 10.5 in
Cube	2.570 ft <sup>3</sup>
Case weight	_23 lbs. Net 21.4 lbs.
Pieces/case	_2,520 pcs. (149 pcs. * 17 rows)
Pallet	28 boxes at 80" high
Tie/high	4 boxes per 7 layers
Pieces/pallet	70,560
Box Label	Item code, description, quantity, production
DOX Label	number, production date, and operator.
Storage	Dry conditions. Three year shelf life.
GTIN-14	10811122021722

Approved	Date	Revision	Modifications
Eugene Southworth Plant Manager Eugene Southworth	2/15/2019	2	Rev. 2: General Modifications

# **OP 80/38**


### N9J08185

### Technical Data

Bottom (A)
Outter rim (B)
Height (C)
Mold Weight
Basis Weight
Heat resistance

	Tolerance		
57 mm	± 1 mm		
93 mm	± 1 mm		
38 mm	± 1 mm		
3.8 g	± 5 %		
170 gsm	± 5 %		
390° F max			

### Technical Drawing

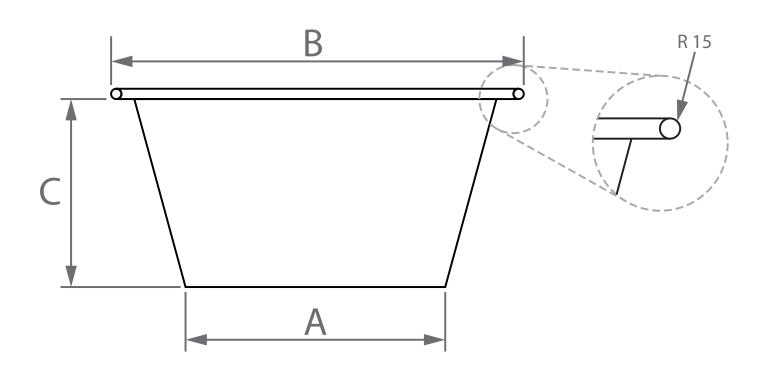

Approved	Date	Revision	Modifications
Eugene Southworth  Plant Manager Eugene Southworth	2/15/2019	2	Rev. 2: General Modifications