

General Purpose Machine for a Wide Variety of Applications



Standard Features:


- Fully Re-Circulating Shrink Tunnel
- Live Roller Rod Conveyor Provides Best Shrink Results
- Digital Temperature Control 0-400°F
- Adjustable Air Velocity Control
- State of the Art AC Variable Speed Conveyor 0-75FPM
- Chromed Conveyor Rollers and Shaft (No Rust)
- Automatic Tunnel Cool Down and Shut Off
- 1HP Blower Motor
- Sealed Bearings on Drive and Idler Shafts
- Quietest Tunnel on the Market
- Heats up to 300°F in Less than 15 Minutes
- Thermal Overload Protection on All Motors
- Anti-Jam Safety Feature on Conveyor
- Chamber Sizes: 22"W x 8"H x 48"L (12" and 16" Heights Available)
- Longer chamber length (44") for Faster and Better Shrinking
- Can Pair with our SS-1622 L-Bar Sealers
- Adjustable Leveling Pads 35" – 39.5"
- 15 KW Heater Bank
- 1 Year Warranty

The ST-2208-Series Shrink Tunnel is a great general purpose shrink tunnel which can be used for a wide variety of applications: laying bottles down, using full length PVC shrink sleeves, shrinking pre-form shrink bands over containers, using regular cut shrink bands, using as a curing or drying tunnel.

This tunnel features a fully re-circulating chamber with air flow coming from all four sides to provide the best shrink results and a live roller rod conveyor. This feature is normally only found on much more expensive tunnels. AC variable speed drive with digital temperature control 0-400°F.

Optional Features:

- 12" or 16" Tunnel Opening
- Close Roller Spacing ½" Gap
- PTFE Mesh Belt
- Stainless Steel Metal Mesh Belt

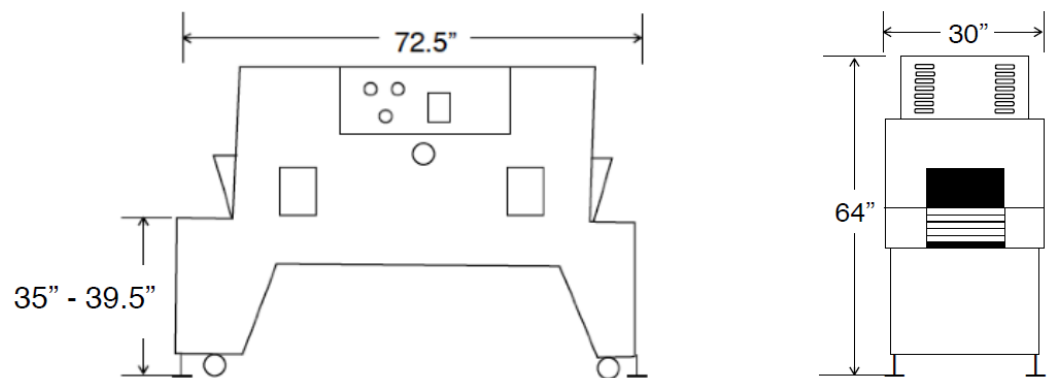


| SPECIFICATIONS | POWER | WEIGHT (LBS) | TUNNEL DIM (L X W X H) | SPEED | BLOWER MOTOR | HEATER BANK |
|----------------|---------------------|--------------|------------------------|---------|--------------|-------------|
| ST-2208-48 | 220V, 3 PH, 50 AMPS | 600 / 840 | 48" X 22" X 8" | 0-75FPM | 1 HP | 15 KW |
| ST-2212-48 | 220V, 3 PH, 50 AMPS | 630 / 860 | 48" X 22" X 12" | 0-75FPM | 1 HP | 15 KW |
| ST-2216-48 | 220V, 3 PH, 50 AMPS | 660 / 890 | 48" X 22" X 16" | 0-75FPM | 1 HP | 15 KW |

SHRINK TUNNEL – GENERAL PURPOSE


Model: ST-2208-48




Falcon Belting



PTFE Mesh Belting



Stainless Steel Metal Belting



High Density Rollers – Close Roller
Spacing – 1/2" Gap




Variable Speed Control
0-75FPM



Variable Air
Velocity

Adjustable Leveling Pads

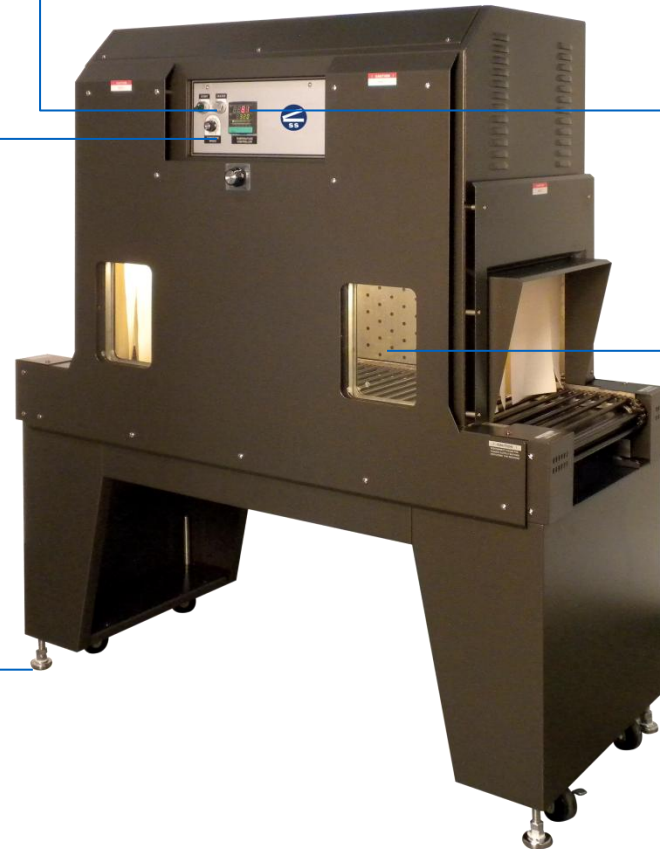

Digital Temperature Control



Lighted Viewing Window

8820 Baird Avenue • Northridge, CA 91324 • T: 818-718-8818 • F: 818-718-8857

✉ contact@sealersales.com

💻 www.sealersales.com