



Project _____
Item # _____ Quantity _____
Model # _____



Custom Cabinet with Hidden Induction Warmer and SmartStone® Top

Model #	Voltage	Peak Power	Plug Type
SRC-651SS (US)	110-120	650 W	NEMA 5-15P
SRC-653SS (Int'l)	220-240	650 W	CEE-7/7 16A Schuko
SRC-653SSU (UK)	220-240	650 W	BS 1363 (13A) U.K.

Description:

Spring USA's Custom Cabinet with Hidden Induction Warmer featuring a SmartStone® Top is a heating unit for product holding with a separate control panel. Each range includes our exclusive SmartScan® technology with over/under voltage protection, pan size and pan type recognition, and large LED power/temp display.

Construction & Performance Features:

- Magnetic SmartScan® technology heats the serving vessels, not the countertop
- Sealed induction base with flanged cooking surface for easy mounting under countertop
- Separate control panel with 36" cable for easy mounting
- Choice of (20) SmartStone® colors
- Choice of (8) laminates or (9) wood stains
- Simple, solid state controls
- Power ON/OFF touch pad
- Power ON/Pan-Present indicator lights

- Four-Position Set-Hold Temperature Control
- Lighted temperature indicator
- Temperature range:

Low	Low-Med	Med-High	High
145-155°F	156-165°F	166-175°F	176-185°F
62-68°C	69-73°C	74-79°C	80-85°C

Standard Warranty:

Spring USA Induction Ranges offer a one-year, overnight exchange warranty (continental US only), from the date of invoice, against manufacturers defects. See SpringUSA.com for more details.

Agency Listings:

- ETL
- FCC
- CETL
- ETL-Sanitation to NSF-4



Aug 2019



Project _____
Item # _____ Quantity _____
Model # _____

Custom Cabinet with Hidden Induction
Warmer & SmartStone®

Available Accessories/Alternate Configurations:


- Induction-ready Cookware and Serving Vessels
- Built-In, High Power Induction Ranges
- Countertop, Portable Induction Ranges
- Mobile & Custom Configurations [Contact Spring USA]

Electric Requirements:

Model #	Voltage	Phase	Hertz	Watts	Amps	Plug
SRC-651SS (US)	110-120	1	60	650	5.4	NEMA 5-15P
SRC-653SS (Int'l)	220-240	1	50-60	650	2.7	CEE-7/7 16A Schuko
SRC-653SSU (UK)	220-240	1	50-60	650	2.7	BS 1363 (13A) U.K.

Key Dimensions:

TOP VIEW




Net Weight: 11.0 lb. (5.0 kg)

FRONT VIEW



SIDE VIEW

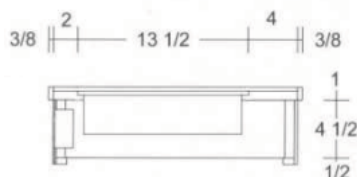

Aug 2019



Project _____
Item # _____ Quantity _____
Model # _____

Custom Cabinet with Hidden Induction
Warmer & SmartStone®

Shipping Dimensions:

Single Unit Shipping Carton				
Model #	Length	Width	Height	Weight
SRC-651SS (US)	22.0"	19.0"	7.5"	13.0 lb.
SRC-653SS (Int'l)	559 mm	483 mm	191 mm	5.9 kg
SRC-653SSU (UK)	559 mm	483 mm	191 mm	5.9 kg

Notes & Conditions:

1. SRC Tabletop Induction units are customizable units.
2. SmartStone® Induction Warmers are sold as a complete system. Ranges are not sold separately.
3. Actual range temperature may vary due to a number of variables, such as ambient temperature in the immediate surrounding area, content and volume of food being heated or cooked, and whether or not you are using a cover on the serving vessel.
4. This induction range requires use of ferrous metal, induction-ready cookware.
5. Spring USA Induction Servers and Induction Warmers/Ranges are designed to work together as a system. Optimal performance is achieved by using Spring USA components in conjunction with each other. As the first to offer such induction systems, Spring USA cannot warranty the performance of facsimile products offered by other companies.