

MILLER VC570

TECHNICAL DATA

SP550 Rev. A

Dec. 2023

Guided-type fall arrester VC570 with self-locking carabiner.
Ensures the connection between full body harness and Vi-Go vertical wire rope system.

REFERENCES

FPH_VC570

MATERIALS

Housing:	Stainless Steel
Shock absorber:	Stainless Steel
Locking device:	Stainless Steel
Cover:	Polyamide
Carabiner:	Galvanized steel

TECHNICAL

Breaking strength:	>15 kN / 3300 lbf
Operating temperature:	-40 °C to +70 °C / -40 °F to +158 °F
Min. user weight:	50 kg / 110 lb
Max. user weight:	140 kg / 310 lb

PRODUCT SPECIFICATIONS

Weight:	1,42 kg / 3.13 lb
Length:	251 mm / 9.9 in
Width:	51 mm / 2.0 in
Height:	119 mm / 4.7 in

MAIN FUNCTIONS

- Stainless steel energy absorbing element
- Triple-action, self-locking swivel safety carabiner hook
- To be connected to the sternal anchorage point of the full body harness
- Embedded RFID tag for asset tracking

USAGE

- Compatible with 8 mm (5/16 in) and 10 mm (3/8 in) wire ropes
- Suitable for use on automatic and manual intermediate brackets

CERTIFICATION

Meets all applicable OSHA 1926.502, 1910.29, ANSI Z359.16-2016 and CSA Z259.2.5-2017

QUALITY CONTROL

EN ISO 9001 certified and Quality check for each part


Limitless Possibilities. Ask the Expert.
Technical Service: 800.873.5242
www.millerfallprotection.com

Honeywell Safety Products USA, Inc.
855 S Mint St
Charlotte, NC 28202
www.honeywell.com

USA
Phone: 800.430.5490
Fax: 800.322.1330

 This equipment should only be used after reading and understanding the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.

Canada
Phone: 888.212.7233
Fax: 888.667.8477

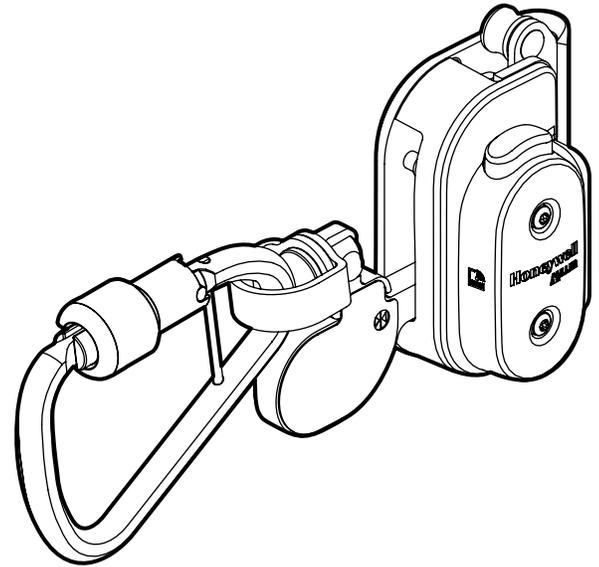

THE
FUTURE
IS
WHAT
WE
MAKE IT

Honeywell