



## ***Stainless Steel Table with Shelf Guide***



## Superior by Design

***Stainless steel tables reimagined and re-engineered from the ground up to eliminate tubular frames and hollow components.***

### Always Stainless

High quality materials result in high quality products for sanitary environments.

### Fully Formed

No tubing or hollow components whatsoever, eliminating areas for bacteria and contaminants to harbor.



### Simple Sanitation

Engineered with sanitation and maintenance teams in mind. Simple designs mean simple, less time-consuming sanitation.

### Selection

Choose from five different footing options and eight different dimensions to find the table best suited for your needs.

### Durable

Built to withstand prolonged use and harsh routine sanitation.



### Top

The top is formed of 11 gauge / 304 stainless steel and TIG welded complete to the frame. Our patented design eliminates all closed channels and requires no nuts, bolts, or threads for assembly.

### Frame

The frame is constructed of 11 gauge / 304 stainless steel and utilizes completely formed components (no tubular or hollow components). The frame is TIG welded complete and the table is fully assembled. Weight capacity = 1,200 lbs.

### Shelf

The shelf is formed of 14 gauge / 304 stainless steel and TIG welded complete to the frame at 12"H.

### Finish


All components receive a dual-action medium Scotch-Brite finish and all welds are passivated.

### Footing Options

- Paw Print
- Casters
- UHMW Pads
- Adjustable Pads
- Adjustable UHMW Pads

### Shipping

All tables ship LTL/FTL

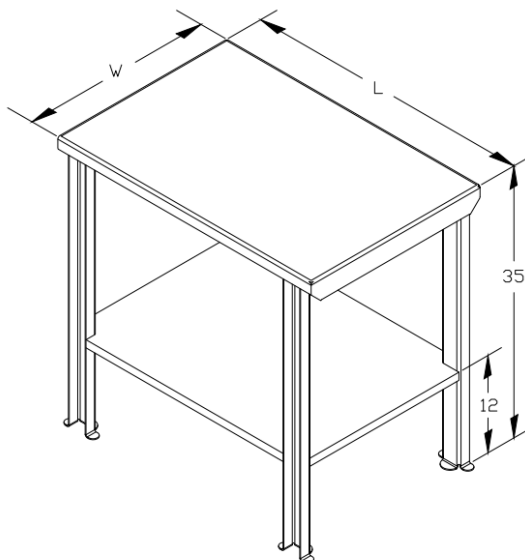

### Standard Dimensions

Length	Width	Height
36"	24"	35"
36"	30"	35"
48"	24"	35"
48"	30"	35"
60"	24"	35"
60"	30"	35"
72"	24"	35"
72"	30"	35"



- SSL Industries' proprietary design
- (3) Formed tabs on the base of the foot for ample stability
- Most preferred option by regulatory bodies due to inherit clean design and sanitation
- USDA Accepted Equipment
- Per the USDA, compliant with the NSF/ANSI/3-A SSI-14159-1-2019 Hygiene Requirement for the Design of Meat and Poultry Processing Equipment

Model No.	Dimensions			Footing
	L	W	H	
SSL-1001-S-36X24	36"	24"	35"	Paw Print
SSL-1001-S-36X30	36"	30"	35"	Paw Print
SSL-1001-S-48X24	48"	24"	35"	Paw Print
SSL-1001-S-48X30	48"	30"	35"	Paw Print
SSL-1001-S-60X24	60"	24"	35"	Paw Print
SSL-1001-S-60X30	60"	30"	35"	Paw Print
SSL-1001-S-72X24	72"	24"	35"	Paw Print
SSL-1001-S-72X30	72"	30"	35"	Paw Print





- Standard 4" solid blue polyurethane wheels
- (2) Rigid and (2) swivel with total locking brakes
- Load capacity of 300 lbs. per caster (1,200 lbs. per table)
- Temperature resistance -40°F to +180°F
- ½" Stainless steel spacers between footing and caster plates
- Stainless steel carriage bolts and acorn nuts
- USDA Accepted Equipment
- Per the USDA, compliant with the NSF/ANSI/3-A SSI-14159-1-2019 Hygiene Requirement for the Design of Meat and Poultry Processing Equipment

Model No.	Dimensions			Footing
	L	W	H	
SSL-1001-C-S-36X24	36"	24"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-S-36X30	36"	30"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-S-48X24	48"	24"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-S-48X30	48"	30"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-S-60X24	60"	24"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-S-60X30	60"	30"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-S-72X24	72"	24"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-S-72X30	72"	30"	35"	½" SS Spacers & 4" Casters



- 1" Thick rectangular UHMW pads on the base of footing for ease of mobility
- Relieved corners on the base of the footing for drainage
- Stainless steel hex cap screws
- USDA Accepted Equipment
- Per the USDA, compliant with the NSF/ANSI/3-A SSI-14159-1-2019 Hygiene Requirement for the Design of Meat and Poultry Processing Equipment

Model No.	Dimensions			Footing
	L	W	H	
SSL-1001-P-S-36X24	36"	24"	35"	UHMW Pads
SSL-1001-P-S-36X30	36"	30"	35"	UHMW Pads
SSL-1001-P-S-48X24	48"	24"	35"	UHMW Pads
SSL-1001-P-S-48X30	48"	30"	35"	UHMW Pads
SSL-1001-P-S-60X24	60"	24"	35"	UHMW Pads
SSL-1001-P-S-60X30	60"	30"	35"	UHMW Pads
SSL-1001-P-S-72X24	72"	24"	35"	UHMW Pads
SSL-1001-P-S-72X30	72"	30"	35"	UHMW Pads



- 7GA stainless steel circular pads welded complete to thread, offering 1-3/4" of adjustability on all feet
- Relieved corners on the base of the footing for drainage
- Completely removable for washdown and sanitation
- Stainless steel hex nuts
- *NOTE: Adjustable feet not USDA Approved Equipment or NSF/ANSI/3-A Compliant due to exposed threads*

Model No.	Dimensions			Footing
	L	W	H	
SSL-1001-A-S-36X24	36"	24"	35"	Adjustable Pads
SSL-1001-A-S-36X30	36"	30"	35"	Adjustable Pads
SSL-1001-A-S-48X24	48"	24"	35"	Adjustable Pads
SSL-1001-A-S-48X30	48"	30"	35"	Adjustable Pads
SSL-1001-A-S-60X24	60"	24"	35"	Adjustable Pads
SSL-1001-A-S-60X30	60"	30"	35"	Adjustable Pads
SSL-1001-A-S-72X24	72"	24"	35"	Adjustable Pads
SSL-1001-A-S-72X30	72"	30"	35"	Adjustable Pads



**Industries**  
CLEAN SAFE SIMPLE®

**Stainless Steel Table**  
**with Shelf & Adjustable UHMW Pads**  
**Model Series SSL-1001-AP-S-LXW**



- 7GA / 304 stainless steel circular pads welded complete to thread with 1" UHMW, offering 1-3/4" of adjustability on all feet
- Relieved corners on the base of the footing for drainage
- Completely removable for washdown and sanitation
- Stainless steel hex screw and nuts
- *NOTE: Adjustable feet not USDA Approved Equipment or NSF/ANSI/3-A Compliant due to exposed threads*

Model No.	Dimensions			Footing
	L	W	H	
SSL-1001-AP-S-36X24	36"	24"	35"	Adjustable UHMW Pads
SSL-1001-AP-S-36X30	36"	30"	35"	Adjustable UHMW Pads
SSL-1001-AP-S-48X24	48"	24"	35"	Adjustable UHMW Pads
SSL-1001-AP-S-48X30	48"	30"	35"	Adjustable UHMW Pads
SSL-1001-AP-S-60X24	60"	24"	35"	Adjustable UHMW Pads
SSL-1001-AP-S-60X30	60"	30"	35"	Adjustable UHMW Pads
SSL-1001-AP-S-72X24	72"	24"	35"	Adjustable UHMW Pads
SSL-1001-AP-S-72X30	72"	30"	35"	Adjustable UHMW Pads