

FEDERAL INDUSTRIES

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234 Email: geninfo@federalind.com Website: www.federalind.com

Project Name:		AIA#
Item #:		
Model #:	Qty:	SIS#
Approval:		

VERSATILE SERVICE TOP OVER REFRIGERATED SELF-SERVE DELI

Designed for those customers looking for up-market styling for maximum visual appeal that will drive product sales.



MODEL	DIMENSIONS				
□ SSRVS3642	(Includes End Panels) 36 x 34 x 42 (in)				
33KV33042	914 x 864 x 1067 (mm)				
□ SSRVS5042	50 x 34 x 42 (in)				
	1270 x 864 x 1067 (mm)				
□ SSRVS5942	59 x 34 x 42 (in)				
	1499 x 864 x 1067 (mm)				
□ SSRVS7742	77 x 34 x 42 (in)				
	1956 x 864 x 1067 (mm)				

STANDARD FEATURES

Model Features

- All-steel base construction with black laminate exterior. Other finishes optional
- Black interior, glass end panels
- Easily accessible light and power switch
- Rear access to refrigeration system for quick and easy service
- Stainless steel top service area with extension
- Adjustable leg levelers
- Appliance receptical on back

Refrigeration

- On-Demand PTC condensate evaporator provided for a totally self-contained system
- Electronic temperature controls maintain 38°-40° F with on-demand defrost
- Easy clean, rustproof insulated evaporator coil compartment
- R449a refrigerant
- Thermometer

Shelving

Two tiers adjustable metal shelves

• 3500k shielded top LED light and undershelf lights

Agency Approvals

- UL and UL Sanitation listed
- DOE 2017 Compliant

OPTIONAL ACCESSORIES

For Self-Service Refrigerated Base

- □ For Self-Serve Refrigerated Base
- ☐ Special Exterior Finish
- ☐ Glass Shelves
- □ White or Stainless Interior (Including Shelves)
- ☐ Energy Saving Night Curtain
- ☐ Reflective End Glass
- □ Security Night Cover
- □ Solid Rear Sliding Access Doors
- □ Remote Refrigeration (EEV Included)

- □ Recessed Casters
- ☐ Front Non-Refrigerated Display Merchandiser
- □ Cord & Plug (NEMA 5-I5P / 59" & 77" 5-20P)
- □ Condensate Pump

For Service Top Display

- □ Sneeze Guard with Top Service Shelf
- ☐ Sneeze Guard with Two Bakery Shelves
- □ Warming Shelf
- ☐ Sushi Case







AIA#

VERSATILE SERVICE TOP OVER REFRIGERATED SELF-SERVE DELI

SIS#


Product Specifications


Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C		
All	Packaged Refrigerated Products	38°F / (3.3°C)		

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.25 (6.4)



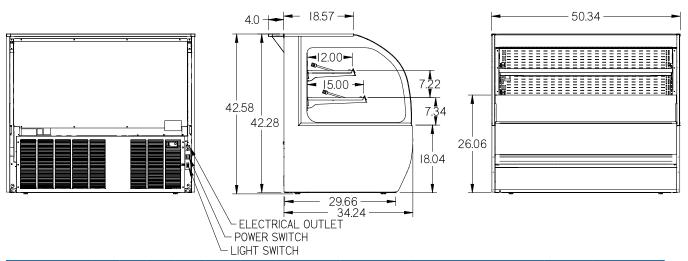

MODEL	DIMENSIONS			SHIPPING WHT		*SELF CONTAINED Permanently Connected			OPTIONAL NEMA PLUG	*REMOTE WITH CONDENSATE PAN		
	L	D	Н1	UNITS	LBS	KILO	VOLTAGE	AMPS	H.P.	CONFIG (SC)	VOLTAGE	AMPS
SSRVS3642	36	34	42	in.	590	268	120/60/1	15 AMPS	1/3 HP	NEMA 5-20P	120/60/1	9 AMPS
	914	864	1067	mm.								
SSRVS5042	50	34	42	in.	720	327	208-240/60/1	10 AMPS	1/2 HP	NEMA 6-15P	120/60/1	10 AMPS
	1270	864	1067	mm.								
SSRVS5942	59	34	42	in.	845	383	208-240/60/1	15 AMPS	1/2 HP	NEMA 6-20P	120/60/1	13 AMPS
	1499	864	1067	mm.								
SSRVS7742	77	34	42	in.	1010 4	450	458 208-240/60/1	15 AMPS	3/4 HP	NEMA 6-20P	120/60/1	14 AMPS
	1956	864	1067	mm.		458						

- * Plus general receptacle 120V, 15AMP. (2nd circuit required)
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.









Phone: 800-356-4206 **Fax:** 608-424-3234

Email: Geninfo@Federalind.com **Website:** Federalind.com