


Size (inches) Nominal W x H x D	Size (inches) Actual W x H x D	Koch Part Number*	Capacity (FPM)	Initial Resistance (inches W.G.)			Media Area (Sq. Ft.)
				90-95%	80-85%	60-65%	
24 x 24 x 36	23-3/8 x 23-3/8 x 36	20_-112-136	500	0.38	0.29	0.23	177
24 x 24 x 30	23-3/8 x 23-3/8 x 30	20_-112-130	500	0.40	0.31	0.25	154
24 x 24 x 24	23-3/8 x 23-3/8 x 24	20_-112-124	500	0.44	0.35	0.29	154
24 x 24 x 15	23-3/8 x 23-3/8 x 15	20_-112-115	500	0.56	0.50	0.42	57
24 x 24 x 12	23-3/8 x 23-3/8 x 12	20_-112-112	375	0.58	0.52	0.44	48
24 x 24 x 36	23-3/8 x 23-3/8 x 36	20_-110-136	500	0.42	0.33	0.27	135
24 x 24 x 30	23-3/8 x 23-3/8 x 30	20_-110-130	500	0.47	0.38	0.32	113
24 x 24 x 22	23-3/8 x 23-3/8 x 22	20_-110-122	500	0.53	0.47	0.39	82
24 x 24 x 18	23-3/8 x 23-3/8 x 18	20_-110-118	500	0.56	0.50	0.42	60
24 x 24 x 15	23-3/8 x 23-3/8 x 15	20_-110-115	500	0.58	0.52	0.44	50
24 x 24 x 12	23-3/8 x 23-3/8 x 12	20_-110-112	500	0.60	0.54	0.46	42
24 x 24 x 36	23-3/8 x 23-3/8 x 36	20_-108-136	500	0.44	0.35	0.29	108
24 x 24 x 30	23-3/8 x 23-3/8 x 30	20_-108-130	500	0.45	0.36	0.30	90
24 x 24 x 22	23-3/8 x 23-3/8 x 22	20_-108-122	500	0.50	0.44	0.35	66
24 x 24 x 18	23-3/8 x 23-3/8 x 18	20_-108-118	500	0.59	0.52	0.44	54
24 x 24 x 15	23-3/8 x 23-3/8 x 15	20_-108-115	500	0.58	0.52	0.42	48
24 x 24 x 12	23-3/8 x 23-3/8 x 12	20_-108-112	500	0.69	0.61	0.54	32
24 x 24 x 36	23-3/8 x 23-3/8 x 36	20_-106-136	500	0.49	0.40	0.33	81
24 x 24 x 30	23-3/8 x 23-3/8 x 30	20_-106-130	500	0.49	0.40	0.34	68
24 x 24 x 22	23-3/8 x 23-3/8 x 22	20_-106-122	500	0.52	0.46	0.37	50
24 x 24 x 18	23-3/8 x 23-3/8 x 18	20_-106-118	500	0.61	0.54	0.44	41
24 x 24 x 12	23-3/8 x 23-3/8 x 12	20_-106-112	500	0.71	0.63	0.56	30
24 x 24 x 15	23-3/8 x 23-3/8 x 15	20_-106-115	500	0.66	0.58	0.50	36

*Insert Efficiency (9=90-95%, 8=80-85%, 6=60-65%) to get correct part # 209-110-136

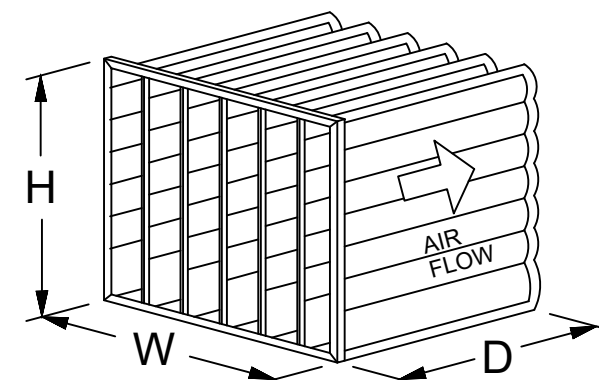

Standard Construction:

- Media: 100% Synthetic Meltblown Media
- Pocket: Sewn Pocket Construction
- Pocket: Span Stitch Pocket Spacing
- Header: Galvanized Steel
- Header Depth: 13/16" Standard
- Galvanized Cross Supports

Specifications:

- 90-95% - MERV 14 (ASHRAE Standard 52.2-2017)
- 80-85% - MERV 13 (ASHRAE Standard 52.2-2017)
- 60-65% - MERV 11 (ASHRAE Standard 52.2-2017)
- Final Resistance: 1.5" W.G.
- Rated Velocity: 500 FPM
- Classified per UL Standard 900
- Max Operating Temp: 180 F (82 C)
- Tolerance: Height & Width - + 0 /- 1/8"
- Tolerance: Depth - +/- 1"

	Multi-Sak Synthetic		REV LTR	REVISION	BY / DATE
			Q	REDRAWN AND REVISED	D. MILLER 03MAY2022
			R	12x24x22 - 5P DATA ADDED	D. MILLER 23FEB2023
			S	24x24x12 - 10P DATA ADDED	D. MILLER 02MAY2023
8401 Air Commerce Drive - Louisville KY 40219 Phone: (502) 634-4796 FAX: (502) 637-2280		Drawn By: Brent Chamberlain Date: July 17, 2009	Revision S		

PG 1