




T771

HEAT OR COOL ONLY THERMOSTAT



Exclusively For
Professionals

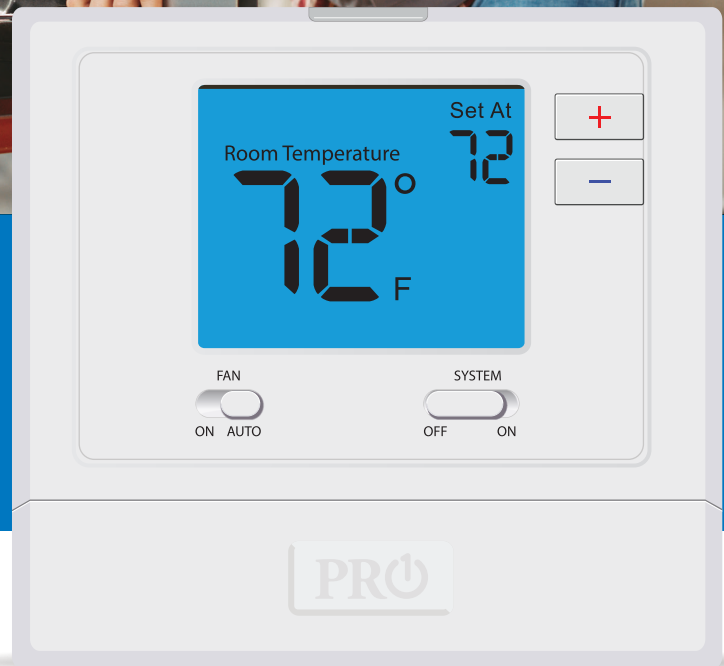

T771

HEAT OR COOL ONLY
THERMOSTAT



PRO

Model #	Commercial 7D 7 Day Programmable NP Non-Programmable	Stages Of Heat		Stages Of Cool		Heat Pump Systems With Auxiliary		Conventional Systems		PTAC Mode		Display Size (square inches)		Filter Change Reminder		Room Temperature Calibration		Adjustable Heat & Cool Temperature Swing		Programmable Fan		Adjustable Setpoint Limits		Auto Changeover		Memory Type (permanent)		Remote Sensor Capable		Outdoor Temperature Sensor Capable		WiFi Ready		Fan Speeds		Warranty (years)		Terminals	
T771	NP	0/1	0/1			•		4		•	•			•		•		•		•		•				•	1	5	R,C,W,Y,G										



The display range of temperature.....	20°F to 99°F (-6°C to 35°C)
The control range of temperature.....	20°F to 99°F (-4°C to 32°C)
Load rating.....	1 amp per terminal, 1.5 amp maximum all terminals combined
Display accuracy.....	±1°F
Swing (cycle rate or differential).....	Heating is adjustable from 0.2°F to 2.0°F Cooling is adjustable from 0.2°F to 2.0°F
Power source.....	18 to 30 VAC, NEC Class II, 50/60 Hz for hardwire (common wire) Battery power from 2 AA 1.5v batteries
Operating ambient.....	20°F to + 105°F (0°C to + 41°C)
Operating humidity.....	90% non-condensing maximum
Dimensions of thermostat.....	4.7"W x 4.4"H x 1.1"D

Great for garages, warehouse applications
and computer equipment rooms.

rev. 2040



1-800-PRO1-559 (776-1559)

PRO

www.pro1iaq.com