

REFRIGERATED DELI DISPLAY CASES



Curved Countertop



Curved Drop-In



Cubed Countertop



Cubed Self-Serve

DESCRIPTION

Vollrath® Refrigerated Deli Display Cases keep chilled, prepared foods—deli (TCS-Time/Temperature Control for Safety) products—cold while displaying them for sale. Cases have operator-side sliding doors for easy access when selling, refilling, changing displays, and cleaning. Self-serve units also have front sliding doors for convenient customer access.

Refrigerated cases are not intended or designed to cool or chill food, or for overnight storage of perishable food.

AGENCY LISTINGS



Classified by UL
to NSF/ANSI 7

WARRANTY

All models shown come with a Vollrath® standard warranty against defects in materials and workmanship, with 5-year part warranty on compressor (one year on labor). For full warranty details, please refer to vollrathfoodservice.com.

CLEARANCE

- Countertop cases allow for zero side clearance.
- Operator side and top to ceiling must remain clear of obstructions for proper operation and service.
- Sufficient air circulation is required so the unit operates as intended. Do not cover vents on bottom shelf or allow product to overhang shelves.

Due to continued product improvement, please consult vollrathfoodservice.com for current product specifications.

ITEMS

Item	Model	Description
RDCCV-36	RDC9236	Curved Countertop—36"
RDCCV-48	RDC9248	Curved Countertop—48"
RDCCV-60	RDC9260	Curved Countertop—60"
RDCCV-36DI	RDC9136	Curved Drop-In—36"
RDCCV-48DI	RDC9148	Curved Drop-In—48"
RDCCV-60DI	RDC9160	Curved Drop-In—60"
RDCCB-36	RDC9336	Cubed Countertop—36"
RDCCB-48	RDC9348	Cubed Countertop—48"
RDCCB-60	RDC9360	Cubed Countertop—60"
RDCCB-36SS	RDC9436	Cubed Countertop, Self-Serve—36"
RDCCB-48SS	RDC9448	Cubed Countertop, Self-Serve—48"
RDCCB-60SS	RDC9460	Cubed Countertop, Self-Serve—60"


NOTICE: These items must ship by truck.

FEATURES & BENEFITS

- Unit is UL Classified for TCS foods.
- Inside top and shelf LED lighting highlights displayed foods.
- Fans circulate air to ensure even temperatures.
- Digitally-controlled thermostat provides precise settings.
- Frequent, shortened auto-defrost improves temperature consistency and increases time between manual defrosts.
- Manual defrost performs a full cycle during non-display time.
- R290 is a safe and environmentally-friendly refrigerant.
- Argon-filled and sealed, double-pane, low-emissivity coated glass provides strength and energy efficiency.
- Glass heater keeps customer viewing area clear.
- Three-position adjustable, floating shelves (1 in curved & 2 in cubed) offer a sleek aesthetic and flexible display options.
- Lift-and-remove sliding doors allow for simple display adjustments and easy cleaning.
- 32 °F–46 °F (0 °C–8 °C) temperature range adds versatility.
- Ambient display option allows for product flexibility.
- Drop-Ins can be used as countertop units.
- 4" adjustable legs can be purchased separately.
- 6 ft (1.8 m) cord increases placement options.

Approvals	Date

DIMENSIONS shown in inches (cm)

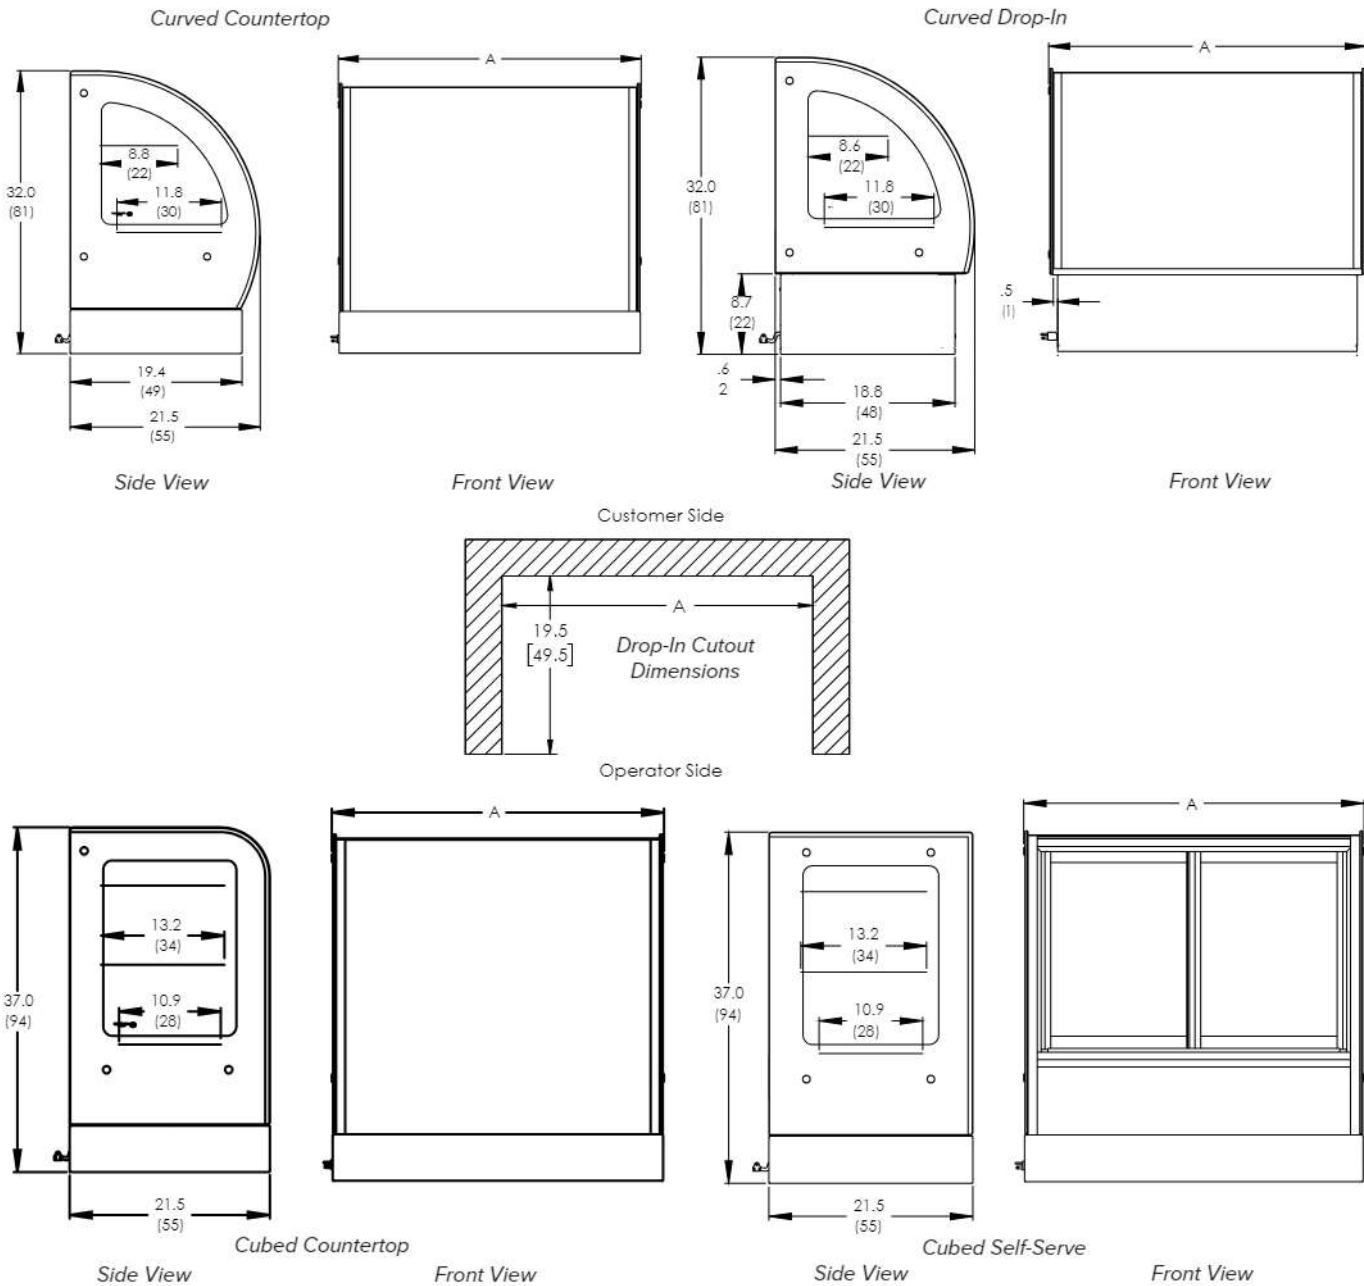

SPECIFICATIONS

Item		Width (A)	Cutout Width (B) Drop-In Cases Only	Volts	Hz	Amps	Weight lb (kg)		Cord w/ Plug (Included)
Standard	DI/SS						Std	DI/SS	
36" Curved Countertop	Drop-In	35.9 (91)	34 (86.4)	120	60	6.1	325.0 (147.4)	309.1 (140.2)	NEMA 5-15P
36" Cubed Countertop	Self-Serve						381.0 (172.8)	388.5 (176.2)	
48" Curved Countertop	Drop-In	47.9 (122)	46 (116.8)			6.9	391.5 (177.6)	374.3 (169.8)	
48" Cubed Countertop	Self-Serve						425.1 (192.8)	473.6 (214.8)	
60" Curved Countertop	Drop-In	59.9 (152)	59 (152)				454.6 (206.2)	447.5 (203.0)	
60" Cubed Countertop	Self-Serve						534.0 (242.2)	550.7 (249.8)	

VOLLRATH

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Main Tel: 800.624.2051 or 920.457.4851
Main Fax: 800.752.5620 or 920.459.6573
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560

Technical Services
techservicereps@vollrathco.com
Induction Products: 800.825.6036
Countertop Warming Products: 800.354.1970
All Other Products: 800.628.0832