OVENS



VC55E SERIES DOUBLE DECK ELECTRIC CONVECTION OVENS



Model VC55ED
Shown with optional casters







SPECIFICATIONS

Double section, electric convection oven, Vulcan Model No. (VC55ED). Stainless steel front, sides, top and legs. Independently operated stainless steel doors with double pane windows. Non-sag insulation applied to the top, rear, sides, bottom and doors. Porcelain enamel on steel oven interiors measure 29"w x $22\frac{1}{8}$ "d x 20"h. One interior oven lights per section. Five nickel plated oven racks per section measure $28\frac{1}{4}$ " x $20\frac{1}{2}$ ". Eleven position nickel plated rack guides with positive rack stops per section. Each section heated by electric solid sheath elements rated at 12 KW. Furnished with a two speed $\frac{1}{2}$ H.P. oven blower-motor per section. Oven cool switch for rapid cool down. 208 or 240 volt, 60 Hz, 1 or 3 phase.

Exterior Dimensions:

40.1"w x 40.0"d (includes motor & door handles) 37.75"d (includes motor only) x 70"h on 8" legs.

NSF listed. UL listed.

□ **VC55ED** Solid state temperature dial controls adjust from 150° to 500°F with digital display enhancement. 5-hour timer with audible alarm.

STANDARD FEATURES

- Independently operated removable stainless steel doors with double pane windows.
- Gentle Bake mode selector switch.
- On-board diagnostics for easy servicing
- Five nickel plated grab-and-go oven racks with eleven rack positions per section.
- Stainless steel front, sides, top and legs.
- 25 total KW.
- ½ H.P. two speed oven blower-motor.
- Moisture vent.
- Oven cool switch for rapid cool down.
- Porcelain enamel on steel oven interiors.
- One year limited parts and labor warranty.

OPTIONS

- □ Casters.
- ☐ 480V/60 Hz/1 or 3 phase.
- ☐ Second year extended limited parts and labor warranty.

ACCESSORIES

- ☐ Stainless steel rear motor enclosure.
- ☐ Extra oven rack(s).
- ☐ Rack hanger(s).
- ☐ Stainless steel drip pan.
- $\hfill\square$ Down draft flue diverter for direct vent connection.






VC55E SERIES DOUBLE DECK ELECTRIC CONVECTION OVENS


OPTIONAL VOLTAGES


☐ 480 volt, 60 Hz, 3 phase.

CLEARANCES

	Combustible	Non-Combustible					
Rear	2"	2"					
Right Side	4"	4"					
Left Side	1"	1"					





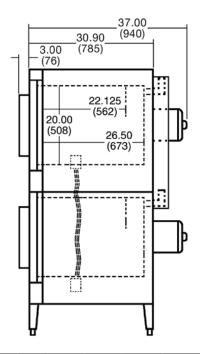

		3 PHASE			NOMINAL AMPS PER LINE WIRE											WEIGHT			
		LOAD KW PER		3 PHASE									WITH SKIDS &		WITHOUT SKIDS &				
MODEL COM	TOTAL CONN.	PHASE		208 VOLT		240 VOLT			480 VOLT			1 PHASE		PACKAGING		PACKAGING			
	KW	X-Y	Y-Z	X-Z	Х	Υ	Z	X	Y	Z	X	Υ	Z	208V	240V	LBS.	KG	LBS.	KG
VC55E	25	8	8	9	70	66	70	66	58	66	28	30	30	120	104	674	306	572	260



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

