




Waterloo 1.8 GPM Wall-Mount Faucet with 15" Double-Jointed Swing Spout, 8" Centers, and Lever Handles

#750CFW815DJ

Item #: 750CFW815DJ Qty: _____

Project: _____

Approval: _____ Date: _____



Features

- 15" long double-jointed swing spout with 1.8 GPM aerator
- Wall-mounted design with 8" adjustable centers and 1/2" NPT inlets
- Temperature rating of 40-180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction
- Leak-resistant quarter-turn ceramic cartridges with check valves

Certifications


 CSA, US and Canada
  NSF Listed
  1/2" Water Connection

Technical Data

Spout Length	15 Inches
Faucet Height	7 3/4 Inches
Cartridge Type	Ceramic
Faucet Centers	8 Inches
Finish	Chrome
Flow Rate	1.8 GPM
Handle Type	Lever
Material	Brass
Mounting Style	Wall Mounted
Mounting Type	Adjustable

Technical Data	
Rough In	8 Inches
Spout Clearance	5 7/16 Inches
Spout Connection Size	1"-20 UNEF
Spout Type	Double Jointed
Temperature Rating	40 - 180 Degrees F
Type	Faucets
Water Inlet Size	1/2 Inches

Plan View

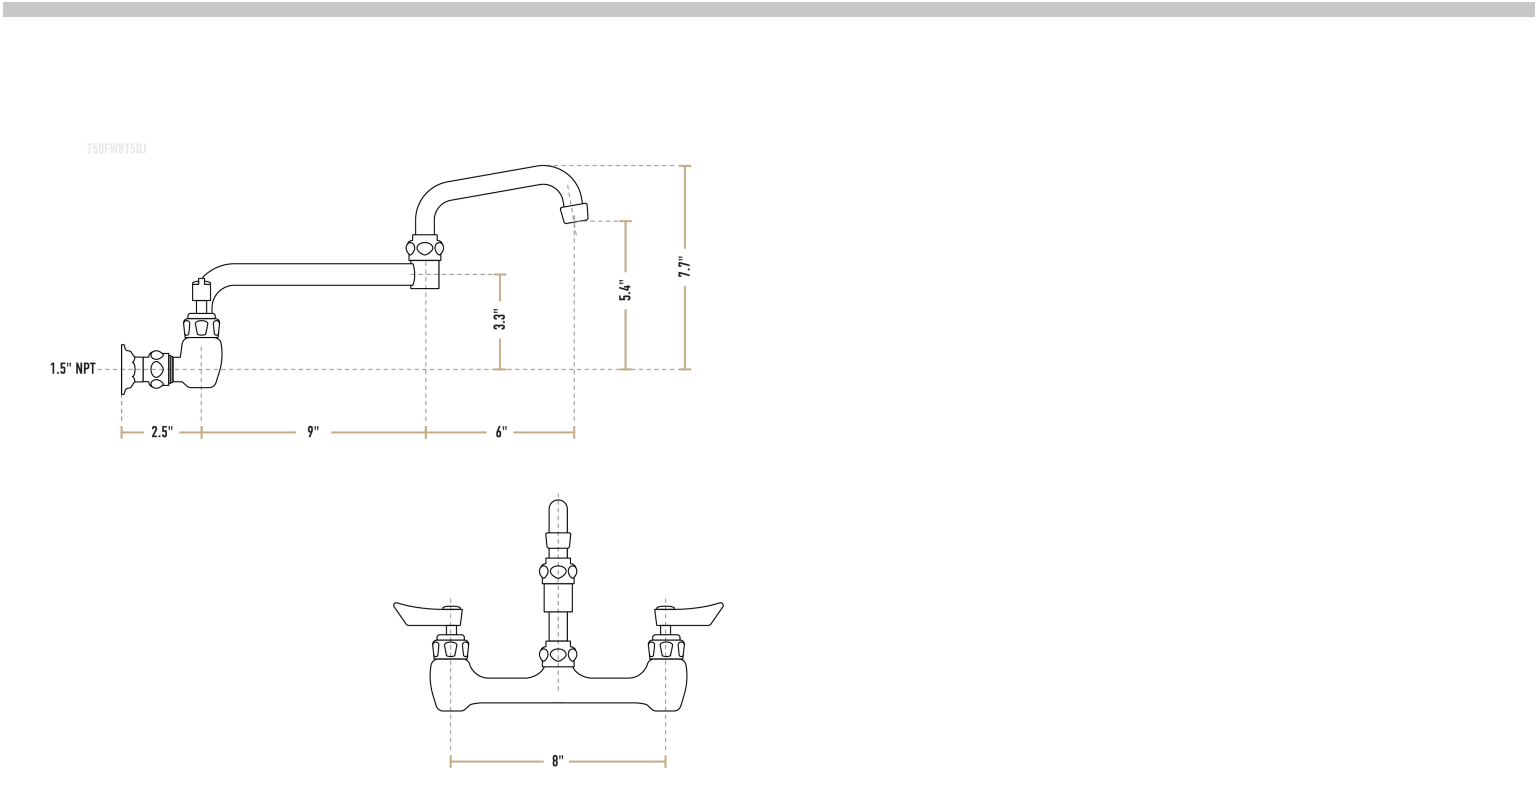

Notes & Details

This Waterloo wall-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy-duty chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence.

This faucet features a 15" long double-jointed swing spout that gives greater range of motion than a standard swing nozzle, with the added benefit of allowing you to fold it out of the way to accommodate large, bulky items. A 1.8 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a set of 8" adjustable centers, while the wall-mounted design is easy to install with 1/2" NPT inlets.

This faucet uses quarter-turn ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.