

Features

- 3 5/8" cast spout, 2.2 GPM flow rate
- 6" deck-mounted base with mounting studs on 4" centers, (1) 18" stainless steel supply line to conne
- Below-deck manual mixing valve, (2) 18" stainless steel supply lines, 1/2" NPSM female x 3/8" female
- Solid chrome-plated brass construction for long life
- Includes AC adapter and control module, can operate on batteries

Certifications





ADA Compliant



3/8" Water Connection



CSA, US and Canada

Waterloo 6" Deck-Mounted Hands-Free Sensor Faucet with 3 5/8" Cast **Spout**

#750EFDM

Item #: 750EFDM	Qty:
Project:	
Approval:	Date:






Technical Data	
Spout Length	3 5/8 Inches
Faucet Width	6 Inches
Faucet Height	47/8 Inches
Adjustable Sensor Range	1 Inches 8 Inches
Battery Type	AA
Faucet Centers	4 Inches
Finish	Chrome
Flow Rate	2.2 GPM
Included	Flex Inlets

Technical Data	
Features	ADA Compliant ASME A112.18.1-2018 / CSA B125.1-18 Hands Free NSF/ANSI 372 NSF/ANSI 61
Material	Brass
Mounting Holes Required	3 Mounting Holes
Mounting Style	Deck Mounted
Plug Type	NEMA 1-15P
Power Type	AC Adapter Battery
Pressure Rating	60 PSI
Spout Clearance	3 11/16 Inches
Spout Type	Cast
Temperature Rating	180 Degrees F
Туре	Touchless Faucets
Water Inlet Size	3/8 Inches

Plan View

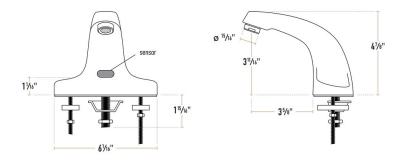

Notes & Details

This Waterloo deck mounted hands-free sensor faucet is the perfect solution when you need a dependable water fixture for your facility's restrooms and hand-washing areas! It features a 3 5/8" long cast spout, with a chrome-plated finish and a 6" wide base to provide a contemporary and refined look wherever it's installed.

This unit has an infrared proximity sensor with a 30 second timeout feature and an adjustable sensor range of 1"-8". Because a sensor activates the water flow, it has several advantages over a traditional handle-style faucet. It is hands-free, which reduces the opportunity for germs to spread, and it also prevents the faucet from running when it's not needed, which helps to cut down on your water bill.

The UL certified AC adapter with a level VI efficiency rating provides power for the faucet's control module, which installs below the countertop and connects to the faucet with an 18" flexible supply line. Or, you can also use (4) AA batteries if an outlet isn't convenient, and to provide backup power in case of an outage. A mixing valve also allows you to easily set the output temperature to the desired level. This prevents burned hands from water that is too hot, while still ensuring that the water is warm enough for users to effectively wash their hands. A pair of 18" flexible stainless steel connectors with 1/2" NPSM female x 3/8" female compression fittings connect the mixing valve to your building's water lines. The base comes with mounting studs set on 4" centers.

Waterloo sensor faucets provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

▲ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.