

Features

- 0.5 GPM flow rate
- Deck-mounted design with a 44" stainless steel supply line
- (2) 18" stainless steel supply lines use 1/2" NPSM x 3/8" female fittings
- Solid brass construction for long life, bronze finish

(**I I**) 1-15P

• Includes AC adapter and control module, concealed sensor

Certifications



3/8" Water Connection

Waterloo Deck-Mount Bronze Hands-Free Sensor Faucet with 6 1/2" Gooseneck Spout, Concealed Sensor, and 0.5 GPM


#750EFDMHSBZ12LF

	50EFDMHSBZ12LF	Qty:	
Project:			
Approval:		Date:	
	n	1	

Technical Data	
Hose Length	44 Inches
Spout Length	6 1/2 Inches
Faucet Height	12 7/16 Inches
Adjustable Sensor Range	1 Inches 6 Inches
Battery Type	АА
Default Sensor Range	4 Inches
Faucet Centers	Single
Finish	Bronze
Flow Rate	0.5 GPM

Technical Data	
Features	ADA Compliant Hands Free Massachusetts Accepted Plumbing Product
Included	Flex Inlets
Material	Brass
Mounting Holes Required	1 Mounting Hole
Mounting Style	Deck Mounted
Plug Type	NEMA 1-15P
Power Type	AC Adapter Battery
Pressure Rating	60 PSI
Spout Clearance	7 15/16 Inches
Spout Type	Gooseneck
Temperature Rating	194 Degrees F
Туре	Touchless Faucets
Water Inlet Size	3/8 Inches

Plan View

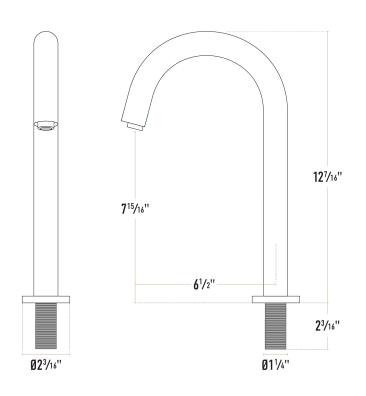

This Waterloo deck-mount bronze hands-free sensor faucet is the perfect solution when you need a dependable water fixture for your facility's restrooms and hand-washing areas! It features a 6 1/2" long, angled gooseneck spout on a single hole base with a bronze finish that provides a contemporary and refined look wherever it's installed. The sensor is also concealed so as to be more aesthetically pleasing than a traditional base-mounted sensor.

This unit has an infrared proximity sensor with a 30 second timeout feature and an adjustable sensor range of 1"-6". Because a sensor activates the water flow, it has several advantages over a traditional handle-style faucet. It is hands-free, which reduces the opportunity for germs to spread, and it also prevents the faucet from running when it's not needed, which helps to cut down on your water bill.

The AC adapter with a level VI efficiency rating provides power for the faucet's control module, which installs below the countertop and connects to the faucet with a 44" flexible supply line. Or, use (4) AA batteries for cordless operation during power outages. A mixing valve also allows you to easily set the output temperature to the desired level. This prevents burned hands from water that is too hot while still ensuring that the water is warm enough for users to effectively wash their hands. A pair of 18" flexible stainless steel connectors with 1/2" NPSM female x 3/8" female compression fittings connect the mixing valve to your building's water lines.

Waterloo sensor faucets provide the industry-leading quality you expect. With a heavy brass faucet body and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to <u>www.p65warnings.ca.gov</u>.