

Features

- 12" swing spout with 2 GPM aerator
- Single base, 1/2" NPT inlets on 20" flexible water hoses
- Temperature rating 40 180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction
- Leak-resistant 1/4 turn ceramic cartridge with check valve

Certifications







Waterloo Deck-Mounted Faucet with Single Inlet and 12" Swing Spout

#750FD112

| Item#: 750FD112 | Qty: |
|-----------------|-------|
| Project: | |
| Approval: | Date: |






| Technical Data | |
|----------------|--|
| Spout Length | 12 Inches |
| Faucet Height | 8 7/16 Inches |
| Cartridge Type | Ceramic |
| Faucet Centers | Single |
| Features | ASME A112.18.1 / CSA B125.1 California AB100 Compliant NSF Listed NSF/ANSI 372 NSF/ANSI 61 |
| Finish | Chrome |

| Technical Data | |
|--------------------|-----------------------------|
| Flow Rate | 2 GPM |
| Handle Type | Lever |
| Material | Brass |
| Mounting Style | Deck Mounted |
| Mounting Type | Adjustable |
| Spout Clearance | 6 1/8 Inches |
| Spout Type | Swing |
| Temperature Rating | 40 - 180 Degrees Fahrenheit |
| Туре | Faucets |
| Water Inlet Size | 1/2 Inches |

Plan View

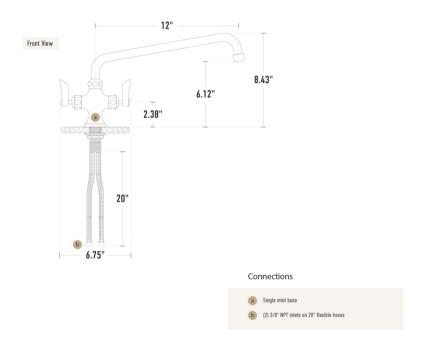

Notes & Details

This Waterloo deck-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

This faucet features a 12" long swing spout that moves easily around the sink bowl, while a 2 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a single base, while the deck-mounted design is easy to install with a pair of 1/2" NPT inlets on 20" flexible water hoses.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.

| ⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov . |
|--|
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |

© 2024 Waterloo