




Waterloo Deck Mount Faucet with 12" Gooseneck Spout and Single Inlet

#750FD1G

Item #: 750FD1G Qty: _____

Project: _____




Approval: _____ Date: _____




Features

- 12" long gooseneck spout, 2 GPM flow rate
- Single base, 1/2" NPT inlets on 20" flexible water hoses
- Temperature rating 40 - 180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction
- Leak-resistant 1/4 turn ceramic cartridge with check valve

Certifications

 NSF Listed
  NSF/ANSI 61 & 372
  CSA, US and Canada

 1/2" Water Connection


Technical Data

Spout Length	12 Inches
Faucet Height	17 3/16 Inches
Cartridge Type	Ceramic
Faucet Centers	Single
Features	Massachusetts Accepted Plumbing Product NSF Listed
Finish	Chrome
Flow Rate	2 GPM
Handle Type	Lever
Included	Flex Inlets

Technical Data		
Material		Brass
Mounting Style		Deck Mounted
Mounting Type		Adjustable
Rough In		Single
Spout Clearance		10 5/8 Inches
Spout Connection Size		1"-20 UNEF
Spout Type		Gooseneck
Sprayer		Without Sprayer
Temperature Rating		40 - 180 Degrees F
Type		Faucets
Water Inlet Size		1/2 Inches

Plan View

Front View

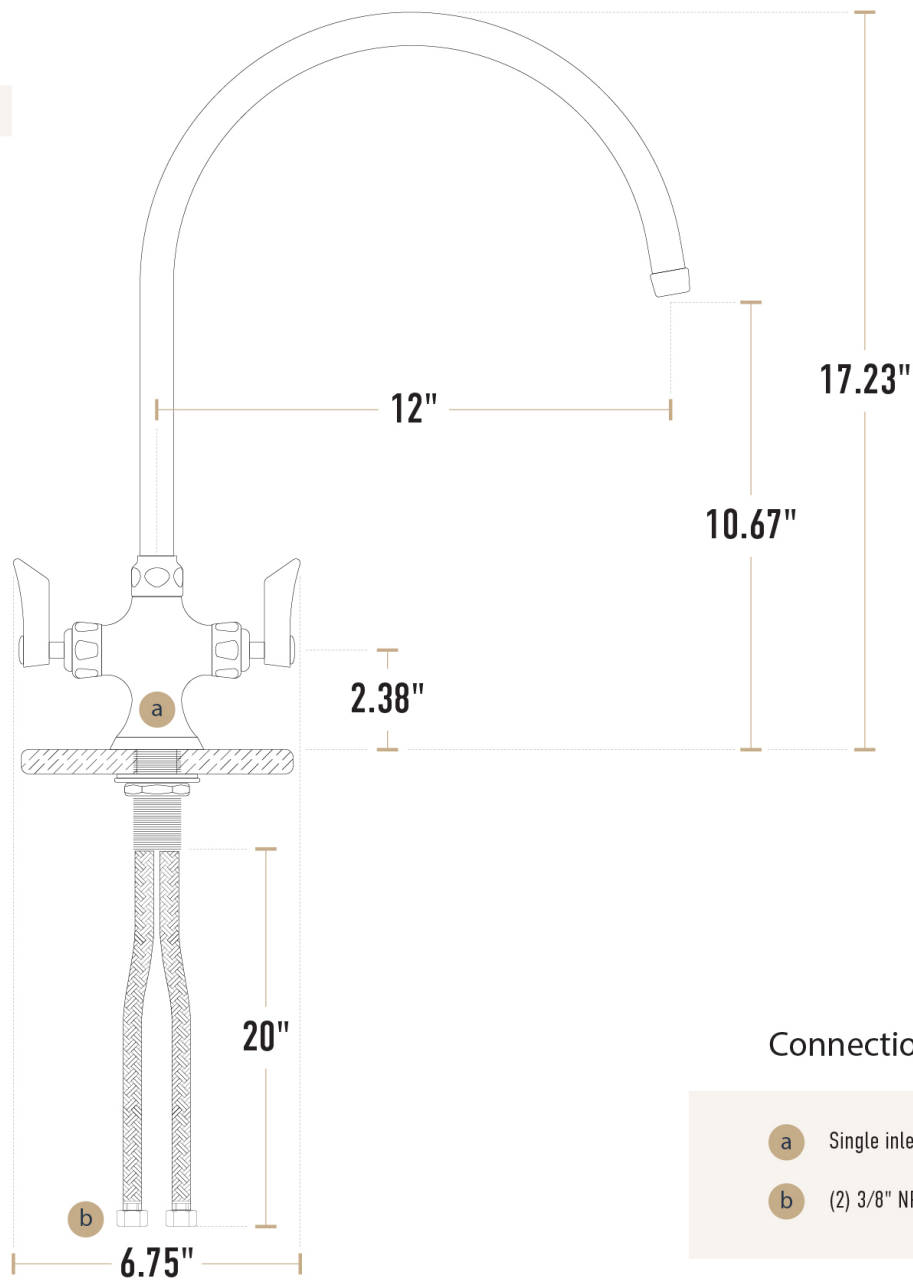

Connections

- a Single inlet base
- b (2) 3/8" NPT inlets on 20" flexible hoses

Notes & Details

This Waterloo deck-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

This faucet features a 12" long swivel gooseneck spout that provides a sleek look with plenty of clearance, while a 2 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a single base, while the deck-mounted design is easy to install with a pair of 1/2" NPT inlets on 20" flexible water hoses.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.