



Item #: 750FD48G Qty:           

Approval: \_\_\_\_\_ Date: \_\_\_\_\_




- 8" long gooseneck spout, 2 GPM flow rate
- 4" adjustable centers, 1/2" NPT inlets
- Temperature rating 40 - 180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction
- Leak-resistant 1/4 turn ceramic cartridges with check valves

 1/2" Water Connection

|                |   |
|----------------|---|
| Spout Length   | 8 Inches  |
| Faucet Height  | 14 11/16 Inches   |
| Cartridge Type | Ceramic   |
| Faucet Centers | 4 Inches  |
| Features       | ASME A112.18.1-2018 / CSA<br>B125.1-18<br>NSF/ANSI 372<br>NSF/ANSI 61 |
| Finish         | Chrome  |
| Flow Rate      | 2 GPM   |
| Handle Type    | Lever   |

| Technical Data     |                    |
|--------------------|--------------------|
| Material           | Brass              |
| Mounting Style     | Deck Mounted       |
| Mounting Type      | Adjustable         |
| Rough In           | 4 Inches           |
| Spout Clearance    | 10 Inches          |
| Spout Type         | Gooseneck          |
| Sprayer            | Without Sprayer    |
| Temperature Rating | 40 - 180 Degrees F |
| Thread Size        | 55/64"-27 UNS      |
| Type               | Faucets            |
| Water Inlet Size   | 1/2 Inches         |

## Plan View

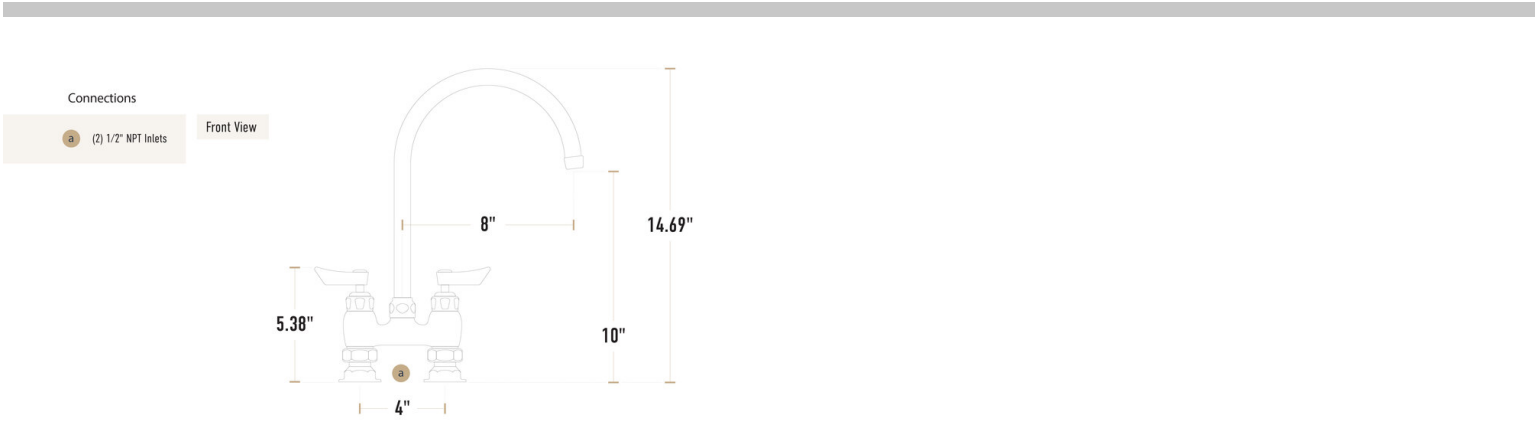

## Notes & Details

This Waterloo deck-mounted faucet with 4" centers and 8" gooseneck nozzle is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

This faucet features a swivel gooseneck spout with an 8" length that provides a sleek look with plenty of clearance, while a 2 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a set of 4" adjustable centers, while the deck-mounted design is easy to install with 1/2" NPT inlets.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).