



## Features

- 15" double-jointed swing spout with 2 GPM aerator
- 8" adjustable centers, 1/2" NPT inlets
- Temperature rating 40 - 180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction
- Leak-resistant 1/4 turn ceramic cartridges with check valves

## Certifications



CSA, US and Canada



NSF Listed



1/2"

1/2" Water Connection


# Waterloo Wall-Mounted Faucet with 8" Centers and 15" Double-Jointed Swing Spout

#750FW815DJ

Item #: 750FW815DJ Qty: \_\_\_\_\_

Project: \_\_\_\_\_

Approval: \_\_\_\_\_ Date: \_\_\_\_\_




## Technical Data

Spout Length	15 Inches
Faucet Height	7 3/4 Inches
Cartridge Type	Ceramic
Faucet Centers	8 Inches
Features	ASME A112.18.1-2018 / CSA B125.1-18 California AB100 Compliant NSF/ANSI 372 NSF/ANSI 61
Finish	Chrome
Flow Rate	2 GPM

Technical Data		
Handle Type		Lever
Material		Brass
Mounting Style		Wall Mounted
Mounting Type		Adjustable
Rough In		8 Inches
Spout Clearance		5.440000057220459 Inches
Spout Type		Double Jointed
Temperature Rating		40 - 180 Degrees F
Thread Size		55/64"-27 UNS
Type		Faucets
Water Inlet Size		1/2 Inches

## Plan View

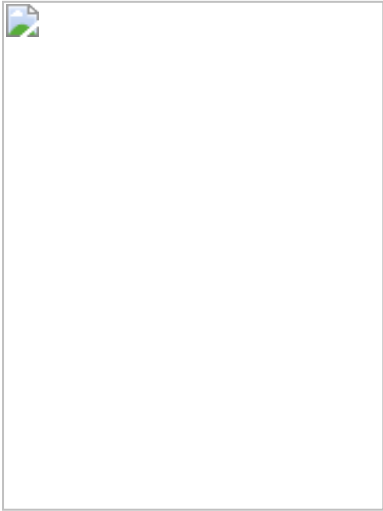


## Notes & Details

---

This Waterloo wall-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

This faucet features a 15" long double-jointed swing spout that gives greater range of motion than a standard swing nozzle, with the added benefit of allowing you to fold it out of the way to accommodate large, bulky items. A 2 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a set of 8" adjustable centers, while the wall-mounted design is easy to install with 1/2" NPT inlets.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.

 **WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).