



Features

- Multi-use faucet for pet grooming, washdown, and other utility applications
- 9' coiled hose, 2.6 GPM spray valve, includes vacuum breaker
- Wall-mounted design with 8" adjustable centers, 1/2" NPT inlets
- 1/4 turn ceramic cartridges for long life and leak-protection
- Heavy-duty faucet base and spray valve, chrome-plated brass construction

Certifications





1/2" Water Connection NSF NSF Listed



Waterloo 2.6 GPM Wall-Mounted Pet Grooming / Utility Faucet with 8" Centers, 9' Coiled Hose, and Vacuum Breaker

#750FWU8

Item #: 750FWU8	Qty:
Project:	
Approval:	Date:






Technical Data	
Hose Length	108 Inches
Faucet Width	12 3/8 Inches
Add-On Faucet	None
Cartridge Type	Ceramic
Faucet Centers	8 Inches
Features	ASME A112.18.1-2018 / CSA B125.1-18 NSF Listed Vacuum Breaker
Finish	Chrome
Handle Type	Lever

Technical Data	
Material	Brass
Mounting Style	Wall Mounted
Mounting Type	Adjustable
Pre Rinse Unit Type	No Riser
Spray Valve Flow Rate	2.6 GPM
Temperature Rating	180 Degrees F
Туре	Faucets
Water Inlet Size	1/2 Inches

Plan View

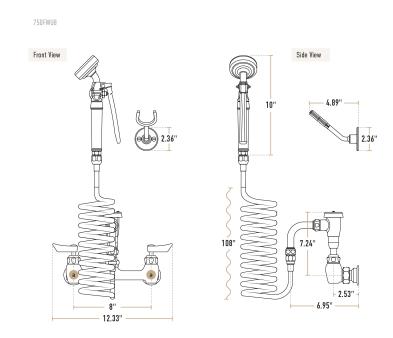

Notes & Details

This Waterloo wall-mounted utility faucet is a versatile water fixture that can fill a wide range of roles in your business, thanks to its coiled, 9' hose and a reliable spray valve design! Waterloo products provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install Waterloo products with confidence. And to give you total peace of mind, this model comes with a 3-year replacement warranty.

A 9' long hose makes it easy to get water exactly where you need it, when you need it, and the coiled design keeps it stowed out of the way when you don't need it. It's a great solution for pet and animal-grooming applications. Restaurants can also use it for easier equipment washdown, and it's great for plenty of other utility applications, too! The spray valve delivers a flow rate of 2.6 GPM, giving you the power needed to blast away debris while still being gentle enough for use on animals, in grooming applications. To prevent harmful backflow, it comes with a vacuum breaker.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. This is a wall-mounted faucet, and it comes with 8" adjustable centers that line up with your sink or mounting surface centers to make installation easy. A set of 1/2" NPT inlets make it easy to connect it to your facility's water lines. Due to flow rate regulations, this faucet cannot be used in a pre-rinse application for pre-scrapping dinnerware.

▲ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov .