

Waterloo 0.65 GPM Pre-Rinse Spray Valve with 44" Faucet Hose

#750PRSVH6544



Item #: 750PRSVH6544 Qty: _____

Project: _____

Approval: _____ Date: _____



Features

- Spray valve has a 0.65 GPM flow rate
- Fits all Waterloo pre-rinse units
- 3/4" male inlet
- Ergonomic squeeze handle with hold-down ring
- Includes a flexible 44" long faucet hose

Certifications



3/4" Water Connection



CSA, US and Canada



NSF Listed


Technical Data

| | |
|------------------|--|
| Hose Length | 44 Inches |
| Features | ASME A112.18.1-2018 / CSA B125.1-18 NSF Listed NSF/ANSI 372 NSF/ANSI 61 With Hose |
| Flow Rate | 0.65 GPM |
| Inlet | 3/4"-14 Male Inlet |
| Type | Spray Valves |
| Water Inlet Size | 3/4 Inches |


Plan View

750PRSVLF


Front View

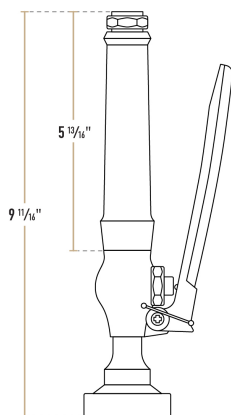

Bottom View



750PRH44



Notes & Details

This Waterloo 0.65 GPM pre-rinse spray valve with 44" faucet hose is an excellent choice when you want to upgrade your old pre-rinse sprayer and hose! Designed to provide the industry-leading quality you expect, this spray valve has a heavy-duty body with metal construction to prevent leaks and keep up with even fast-paced dishrooms. It boasts a 0.65 GPM low flow rate to blast away heavy soil deposits and ensure that glassware and dinnerware come out of the dishwasher clean and ready to use. It comes with a flexible 44" stainless steel hose and a hold-down ring so that you can lock the valve into the on position for constant use. Its universal design with 3/4" male inlet also allows it to be used on all Waterloo pre-rinse units.

Kit Includes:

- 0.65 GPM pre-rinse spray valve
- 44" stainless steel faucet hose

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.