

## GRIDDLES & CHARBROILERS

# SCB SERIES COUNTER MODEL GAS CHARBROILER



Model SCB47C







## **SPECIFICATIONS**

Low profile, high volume gas charbroiler, Wolf Model No. \_\_\_\_\_\_. Stainless steel front, sides, top trim and grease trough. Full width front grease collection drawers. Heavy duty cast iron char-radiants and burners. 5½" wide cast iron diamond grates. One 14,500 BTU/hr. burner for each broiling grate. Underburner deflector system reflects heat upwards. Standing pilot ignition system. One infinite heat control valve for each burner. 4" adjustable legs. ¾" rear gas connection and gas pressure regulator.

### **Exterior Dimensions:**

\_\_\_\_\_" wide x  $27\frac{1}{4}$ " deep x 13" working height.

CSA design certified. NSF listed.

SPECIFY TYPE OF GAS WHEN ORDERING. SPECIFY ALTITUDE WHEN ABOVE 5,999 FT.

SCB25C	25½" wide
SCB36C	36" wide
SCB47C	463/4" wide
SCB60C	60" wide
SCB72C	72" wide

#### STANDARD FEATURES

- Stainless steel sides, control panel, top trim, backsplash and grease trough.
- Full width front grease drawers.
- Heavy duty cast iron char-radiants and burners.
- 51/4" wide sloped cast iron grates are reversible for "level" broiling or self-cleaning. Cast in pitched grease trough in each grate blade provides fat run-off and controls flareups.
- One 14,500 BTU/hr. burner for each broiler grate.
- Standing pilot ignition system.
- One infinite heat control valve for each burner.
- Underburner deflector system reflects heat upwards creating a "Cool Zone" in the grease drawer and drip areas.
- 4" adjustable legs.
- 3/4" rear gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

OPTIONAL FEATURES	
☐ Super-charger burner dividers.	
☐ Diamond rod and waffle pattern cast	iron grates.
☐ Round rod and diamond rod welded s	steel grates.
ACCESSORIES	
☐ 10" deep plate rail	
□ 6" Rackeplach with tapared sides spl	ach kit

ш	O	Dacks	Jiasii	WILII LC	apere	u siues	s spi	asiii	ΛIL	
	St	ainless	steel	stand	with	unders	helf	and	caste	ers





# GRIDDLES & CHARBROILERS

# SCB SERIES COUNTER MODEL GAS CHARBROILER

#### **INSTALLATION INSTRUCTIONS**

- A gas pressure regulator supplied with the unit must be installed: Natural Gas 5.0" (127 mm) W.C.
   Propane Gas 10.0" (254 mm) W.C.
- An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269. When writing refer to NFPA No. 96.
- These units are manufactured for installation in accordance with National Fuel Gas Code, ANSI-Z223.1/NFPA #54 (latest edition). Copies may be obtained from The American Gas Association, Accredited Standards Committee Z223 @ 400 N. Capital St. NW, Washington, DC 20001, or the Secretary Standards Council, NFPA, 1 Batterymarch Park, Quincy, MA 02169-7471.


### **NOTE: In The Commonwealth of Massachusetts**

All gas appliances vented through a ventilation hood or exhaust system equipped with a damper or with a power means of exhaust shall comply with 248 CMR.


4. CLEARANCES – This model series is for installation in noncombustible locations with the following clearances:

	Back	Right Side	Left Side
Above grid level	3"	0"	0"
Below grid level	3"	0"	0"


5. This appliance is manufactured for commercial installation only and is not intended for home use.



MODEL	A		
MODEL	BACKSPLASH	PLATE RAIL	STAND
SCB25	SPLASH6-CB25	PLTRAIL-VCCB25	STAND/C-24
SCB36	SPLASH6-CB36	PLTRAIL-VCCB36	STAND/C-36
SCB47	SPLASH6-CB47	PLTRAIL-VCCB47	STAND/C-48
SCB60	SPLASH6-CB60	PLTRAIL-VCCB60	STAND/C-60
SCB72	SPLASH6-CB72	PLTRAIL-VCCB72	STAND/C-72

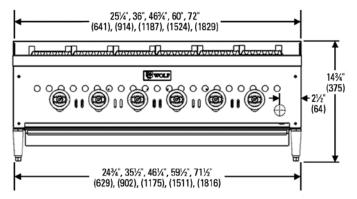

FRONT VIEW



MODEL	WIDTH	DEPTH	OVERALL HEIGHT	WORKING HEIGHT*	BROILING AREA	# BURNERS	TOTAL BTU/HR	APPROX SHIP WT (LB/KG)
SCB25	251/4"				21½" X 20½"	4	58,000	265/120
SCB36	36"				32" X 20½"	6	87,000	355/161
SCB47	463/4"	271/4"	143/4"	13"	43" X 20½"	8	116,000	460/209
SCB60	60"				563/8" X 201/2"	11	159,500	600/272
SCB72	72"				66 <sup>3</sup> / <sub>8</sub> " X 20 <sup>1</sup> / <sub>2</sub> "	13	188,500	720/327



P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602