

GRIDDLES & CHARBROILERS

WEG-E SERIES HEAVY DUTY ELECTRIC GRIDDLE



Model WEG36E







SPECIFICATIONS

Heavy duty electric griddle, Wolf Model No. ______. Stainless steel front and sides. 11" cooking height on 4" adjustable legs. ½" steel plate for 24", 36" and 48" units; ¾" steel plate for 60" and 72" units. Tubular incoloy elements and one snap action thermostat for every 12" of griddle width. Thermostats adjust from 200° to 450° F. Stainless steel 4" back and tapered side splashes. 3½" wide front grease trough empties into large capacity grease drawer. Available in 208V, 240V 50/60 Hz, 1 or 3 phase. 480V 50/60 Hz 3 phase.

NSF Certified. UL Listed. UL Listed to Canadian safety standards.

SPECIFY VOLTAGE WHEN ORDERING.

☐ WEG24E	24" w x 24" d griddle plate
□ WEG36E	36" w x 24" d griddle plate
□ WEG48E	48" w x 24" d griddle plate
□ WEG60E	60" w x 24" d griddle plate
□ WEG72E	72" w x 24" d griddle plate

STANDARD FEATURES

- Stainless steel front, sides and 4" adjustable legs.
- 1/2" steel plate for 24", 36" and 48" units; 3/4" steel plate for 60" and 72" units.
- 11" cooking height on 4" adjustable legs.
- Two solid sheathed tubular incoloy heating elements, one snap action thermostat and cycling light per each 12" griddle width. Thermostats adjust from 200° to 450° F.
- Heavy duty chromed thermostat knob guards
- Stainless steel 4" back and tapered side splashes.
- 3½" wide front grease trough empties into a large capacity grease drawer. 60" and 72" models have two grease drawers.
- Available in 208V or 240V, 50/60 Hz, 1 or 3 phase power supply. 480V, 50/60 Hz 3 phase power supply.
- One year limited parts and labor warranty.

OPTIONAL FEATURES

- ☐ Stainless steel stand with marine edges and casters.
- ☐ Cutting board, condiment rail, plate rail and banking strip accessories.





GRIDDLES & CHARBROILERS

WEG-E SERIES HEAVY DUTY ELECTRIC GRIDDLE

ELECTRICAL CHARACTERISTICS

STANDARD VOLTAGES – 208 VOLTS OR 240 VOLTS 50/60 Hz. – SINGLE OR THREE PHASE 480 VOLTS 50/60 Hz. – THREE PHASE ONLY																
MODEL NO.	TOTAL CONN. KW	TOTAL KW PER CONN	3 PHASE LOADING KW PER PHASE PER CONN.*			NOMINAL AMPS PER LINE WIRE CONN.* 3 PHASE								1 PHASE		
						208 VOLT			240 VOLT			480 VOLT			208	240
			X-Y	Y-Z	X-Z	Х	Υ	Z	Х	Υ	Z	Х	Υ	Z	VOLT	VOLT
WEG24E	10.8	10.8	5.4	5.4	0.0	22.5	45.0	22.5	19.5	39.0	19.5	9.7	19.5	9.7	51.9	45.0
WEG36E	16.2	16.2	5.4	5.4	5.4	45.0	45.0	45.0	39.0	39.0	39.0	19.5	19.5	19.5	77.9	67.5
WEG48E	21.6	21.6	10.8	5.4	5.4	67.4	67.4	45.0	58.5	58.5	39.0	29.2	29.2	19.5	103.8	90.0
WEG60E*	27.0	16.2	5.4	5.4	5.4	45.0	45.0	45.0	39.0	39.0	39.0	19.5	19.5	19.5	77.9	67.5
WEGOUE" 27.0	27.0	10.8	5.4	0.0	5.4	45.0	22.5	22.5	39.0	19.5	19.5	19.5	9.7	9.7	51.9	45.0
WE070E*	WE070E* 00.4	16.2	5.4	5.4	5.4	45.0	45.0	45.0	39.0	39.0	39.0	19.5	19.5	19.5	77.9	67.5
WEG72E* 32.4	32.4	16.2	5.4	5.4	5.4	45.0	45.0	45.0	39.0	39.0	39.0	19.5	19.5	19.5	77.9	67.5

^{*}Model WEG60E and WEG72E require two separate electrical connections and services.

INSTALLATION CLEARANCES:


Sides and rear must be 1" from nearest combustible construction and 0" from non-combustible construction. Bottom must be 4" from combustible or non-combustible construction. This appliance is manufactured for commercial installation only and is not intended for home use.

1.76" Ø 1.36" Ø 3.44" TYPICAL 1.05" TYPICAL 1.05" TYPICAL 1.36" Ø 1.50" TYPICAL 1.50" TYPICAL 1.36" Ø 1.50" TYPICAL

KNOCKOUT LOCATIONS ON BACK PANEL

72 & 60 MODELS ADDITIONAL KNOCKOUTS AT LEFT-REAR CORNER

ALL MODELS KNOCKOUTS AT RIGHT-REAR CORNER

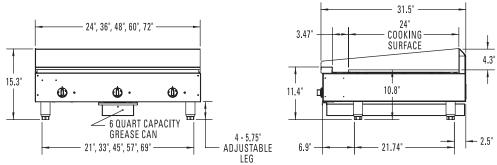

MODELNO	OVE	RALL DIMENSI	ONS	COOKING SURFACE	GREASE DRAWER	APPROX. SHIP WT.	
MODEL NO.	WIDTH	DEPTH	HEIGHT*	DEPTH	CAPACITY (Gals.)		
WEG24E	24" (610)		15.3" (389)	24" (610)	1.5	230 lbs / 104 kg	
WEG36E	36" (914)]			1.5	310 lbs / 141 kg	
WEG48E	48" (1219)	31.5" (800)			1.5	400 lbs / 181 kg	
WEG60E	60" (1524)				2 x 1.5	535 lbs / 243 kg	
WEG72E	72" (1821)				2 x 1.5	610 lbs / 277 kg	

(Dimensions in parenthesis are in millimeters)



P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

