




Z100-DP-89

15 [381] DIAMETER MAIN ROOF DRAIN W/ EXTERNAL
WATER DAM AND LOW SILHOUETTE DOME W/ TOP-
SET DECK PLATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

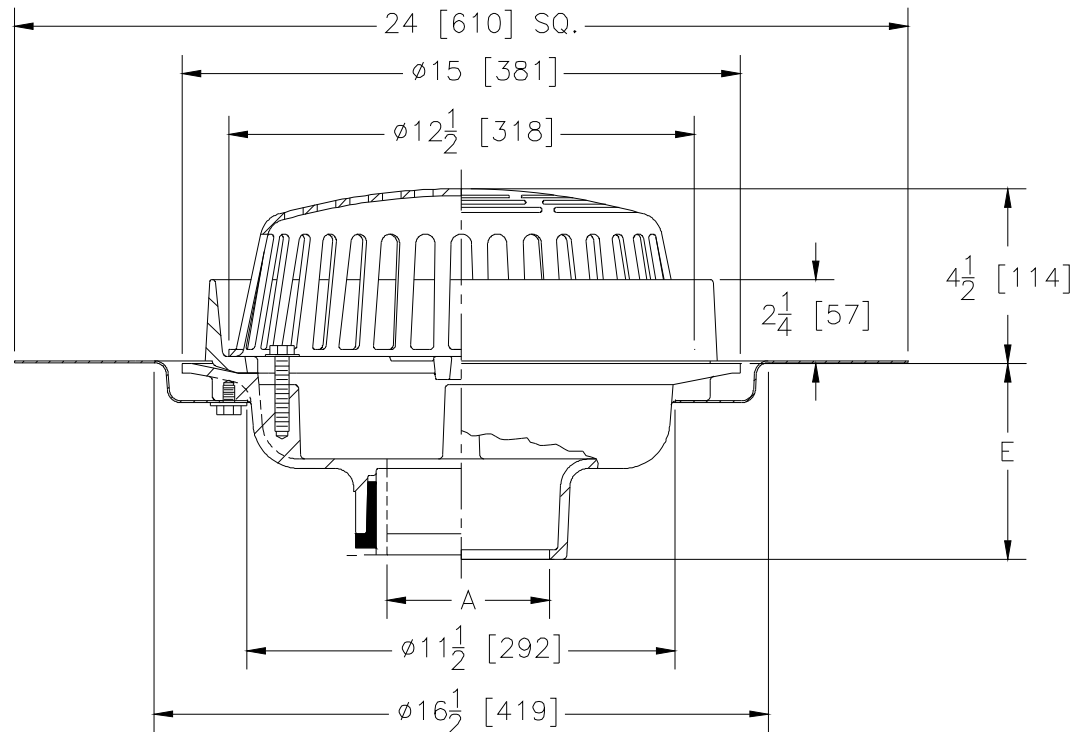

A Pipe Size in [mm]	Approx Wt. lbs [kg]	Dome Open Area in ² [cm ²]
2,3,4 [51,76,102]	49 [22]	103 [665]
6 [152]	50 [23]	
8 [203]	51 [23]	

ENGINEERING SPECIFICATION: ZURN Z100-DP-89

15" [381mm] Diameter roof drain. Dura-Coated cast iron body with 2" [51mm] high combination membrane flashing clamp/gravel guard, Top-Set deck plate, and low silhouette Poly-Dome.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

3,4,6 [76,102,152]
2,3,4,6,8 [51,76,102,152,203]
2,3,4,6,8 [51,76,102,152,203]
2,3,4 [51,76,102]
6 [152]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc
_____ NL Neo-Loc

E BODY HT. DIM.

5-1/4 [133]
3-3/4 [95]
5-1/4 [133]
4-5/8 [117]
5-7/16 [138]

PREFIXES

_____ Z D.C.C.I. Body with Poly-Dome*
_____ ZA D.C.C.I. Body with Aluminum Dome
_____ ZC D.C.C.I. Body with Cast Iron Dome
_____ ZRB D.C.C.I. Body with Plain Bronze Dome

SUFFIXES

_____ -AR Acid Resistant Epoxy Coated
_____ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)
_____ -EA Adjustable Extension Assembly
2-1/8 [54] thru 3-1/2 [89]
_____ -FG Flush Grate (Replaces Dome Strainer)
_____ -G Galvanized Cast Iron
_____ -HD 6-3/4 [171] High Aluminum Dome
(148 sq. in. [955 cm²] open area)
_____ -SC Secondary Clamping Collar
_____ -SS Stainless Mesh Screen Over Dome
_____ -ST Dome w/ Solid Top (ZA and ZC Only)
_____ -TC Neo-Loc Test Cap Gasket
(2,3,4 [51,76,102] NL Bottom Outlet Only)
_____ -VP Vandal Proof Secured Top
_____ -84 Stainless Steel Perforated Gravel Guard
_____ -90 90° Threaded Side Outlet Body

* Regularly furnished unless otherwise specified.