




**Z1036**  
**FLOOR DRAIN INSTALLATION STABILIZER**

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

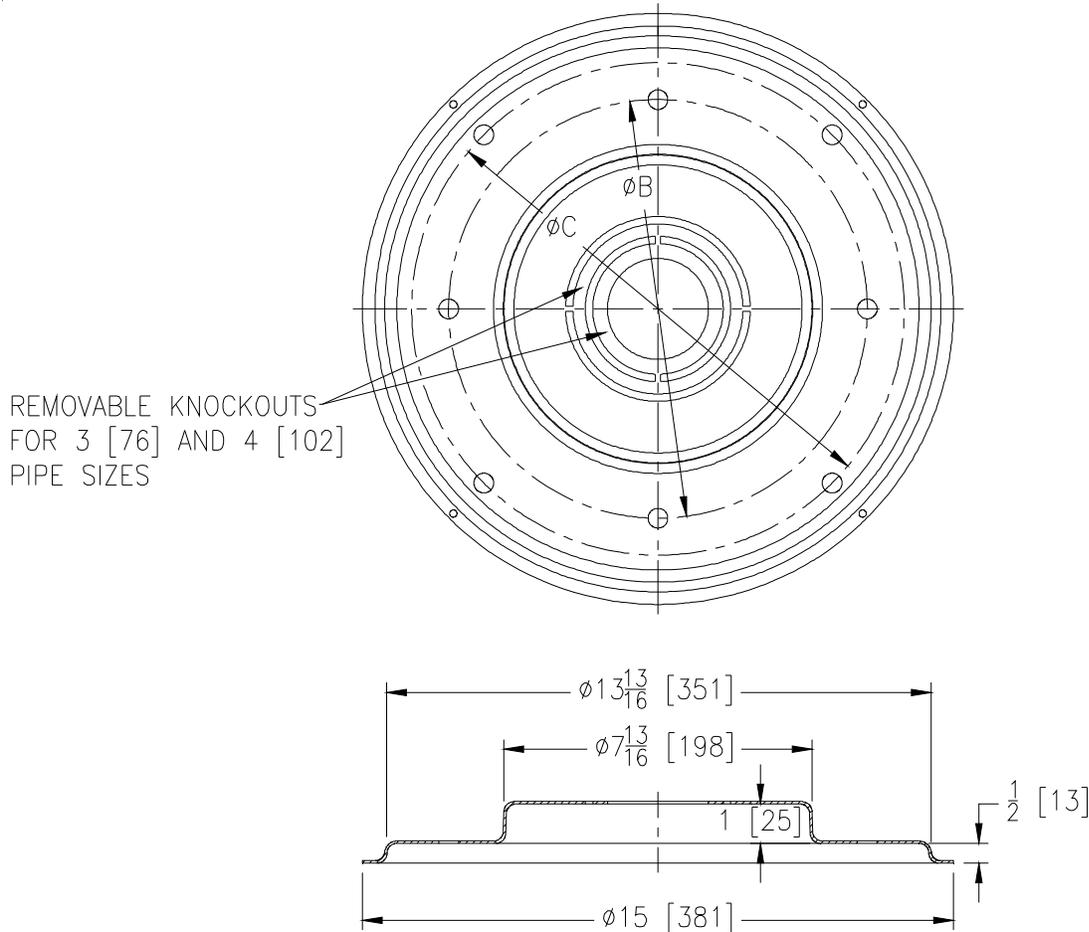

| Pipe Size<br>In. | Pipe Opening<br>Dia. | B<br>Dia.    | C<br>Dia.    |
|------------------|----------------------|--------------|--------------|
| 2 [51]           | 2-9/16 [65]          | 10-5/8 [270] | 12-1/2 [318] |
| 3 [76]           | 3-11/16 [94]         | 10-5/8 [270] | 12-1/2 [318] |
| 4 [102]          | 4-11/16 [119]        | 10-5/8 [270] | 12-1/2 [318] |

**ENGINEERING SPECIFICATION: ZURNZ1036**  
 Drain Installation Stabilizer. #20 gage galvanized steel plate with variable pipe opening, eight support stud holes, and four nail holes. Complete with hardware bag containing four 3/8-16 x 12 [305] long studs and eight 3/8-16 flanged locknuts.

**NOTE:** 'B' dia. stud holes are used to accommodate 12 [305] dia. drain body. 'C' dia. stud holes are used to accommodate 15 [381] dia. drain body. (To be used with No-Hub and Neo-Loc outlet connections only).

\*\* For Typical Installation - See Form# FD72

\* Regularly furnished unless otherwise specified.