



Z1321-CXL


ECOLOTRON WALL HYDRANT

Exposed, Non-Freeze, Anti-Siphon, Automatic Draining

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

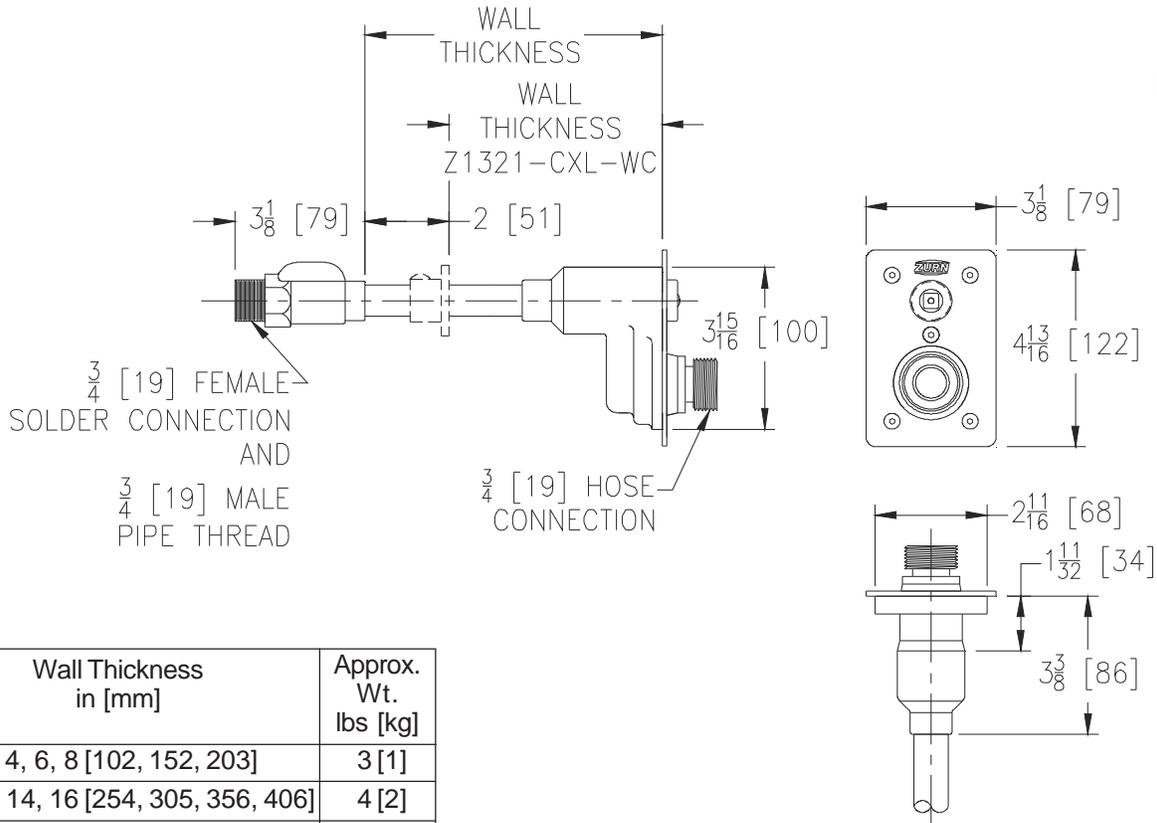

Wall Thickness in [mm]	Approx. Wt. lbs [kg]
4, 6, 8 [102, 152, 203]	3 [1]
10, 12, 14, 16 [254, 305, 356, 406]	4 [2]
18, 20 [457, 508]	5 [2]
22, 24 [559, 610]	6 [3]

ENGINEERING SPECIFICATION: ZURN Z1321-CXL

Exposed, Ecolotrol™, lead-free, non-freeze automatic draining wall hydrant for flush installation. Hydrant features integral backflow preventer with anti-siphon technology, copper casing, bronze and stainless steel interior components, non-turning operating rod with free-floating compression closure valve, combination 3/4" [19] female solder and 3/4" [19] male pipe thread inlet connection, and 3/4" [19] male hose connection. Hydrant furnished with type 304 stainless steel faceplate and includes operating key.

Zurn "XL" Lead-Free compliant products are a line of durable plumbing products designed and manufactured to comply with state laws and local codes that mandate maximum allowable lead content levels. Zurn "XL" products are manufactured in accordance to the Federal SWDA section 1417.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ____-AN Angled Nozzle Hose Connection
- ____-PB Polished Bronze Face
- ____-RK Hydrant Parts Repair Kit
- ____-WC Wall Clamp
- ____-34EL 3/4 [19] 90° Solder Inlet Elbow
- ____-34FIP 3/4 [19] IP Straight Female Inlet Adapter

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
 In Canada | Zurn Industries Limited
 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. -
 Date: 3/26/15
 C.N. No. 131797
 Prod. | Dwg. No. Z1321-CXL