




Z1830-12B

12" [305] DIAMETER ROUND INDUSTRIAL FLOOR DRAIN WITH DEEP BODY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

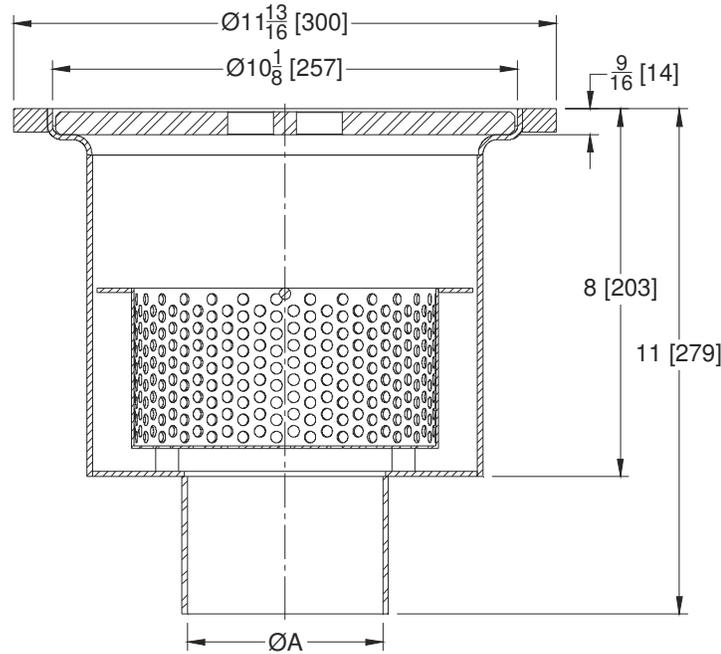

Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
25 [11]	15 [97]

ENGINEERING SPECIFICATION: Z1830-12B

12" [301] Diameter X 8" [203] Deep, 12 gauge, type 304 stainless steel, round industrial sanitary floor drain features loose set heavy-duty slotted grate (1/2 [13] thick plate) with finger holes, 9/16 [14] top frame, perforated removable sediment bucket with lift handle, pre-pour stabilizing anchor tabs, and bead blasted finish. Drain meets U.S. FDA standards for corrosion resistance.

OPTIONS (Check/specify appropriate options)

PIPE SIZE (ØA) (Specify size/type) OUTLET

- 3-4-6[76-102-152] BW Butt-Weld
- 3-4-6[76-102-152] NH No-Hub

PREFIXES

- Z Type 304 (CF8) Stainless Steel*
- ZM Type 316 (CF8M) Stainless Steel

SUFFIXES

- A Adjustable Threaded Outlet
- B Bell Trap
- BF Butterfly Lock Sediment Basket
- K Anchor Flange
- KC Anchor Flange w/ Seepage Holes and Clamp Collar
- MG EZLock Magnetic Lock System
- P 1/2 [13] Trap Primer Connection
- 10 10" [254] Deep Sump

GRATE OPTIONS

- H3 Heavy-Duty Perimeter Gap - 1/2 [13] Plate (15 Sq. In. [97 cm²] Open Area)
- H5 Heavy-Duty Slotted Grate - 1/2 [13] Plate w/ Finger Holes (19.2 Sq. In. [124 cm²] Open Area)

* Regularly furnished unless otherwise specified.