



# Z415-BZ1


## BODY ASSEMBLY W/ "TYPE B" STRAINER and EZ1™ TECHNOLOGY

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

**PATENT PENDING**

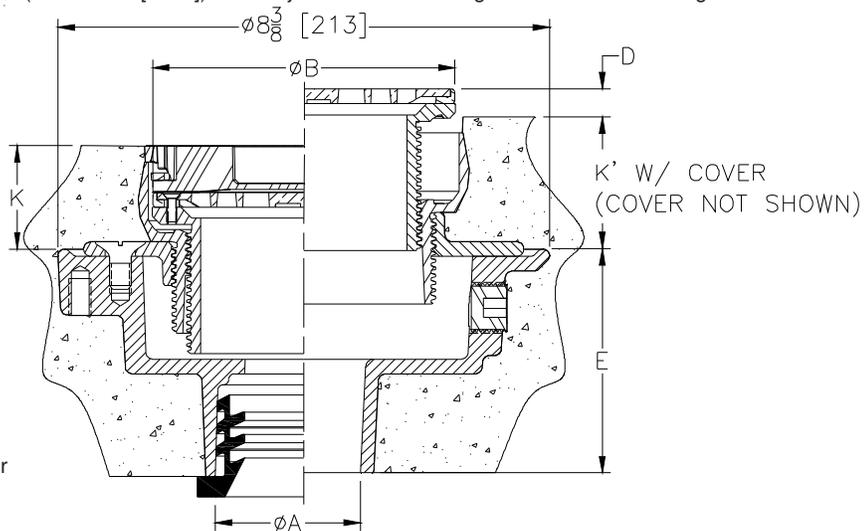

Note:  
Minimum K Dimension is Only Possible with -LR Option when using 6" [152] or 8" [203] Strainer

Dimensions In Inches								Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In [cm <sup>2</sup> ]
A Pipe Size	B Strainer Dia.	D		K		K'			
		Min.	Max.	Min.	Max.	Min.	Max.		
2, 3 [51, 76]	5 [127]	0	1 [25]	1-25/32 [45]	2-31/32 [75]	2-9/32 [58]	3-15/32 [88]	16 [7]	6-1/4 [40]
2, 3, 4 [51, 76, 102]	6 [152]	0	1 [25]	1-13/16 [46]	3 [76]	2-5/16 [59]	3-1/2 [89]	19 [9]	9 [58]
3, 4 [76, 102]	8 [203]	0	31/32 [25]	2-5/32 [55]	3-11/32 [85]	2-21/32 [67]	3-27/32 [98]	24 [11]	20 [129]
6 [152]	8 [203]	0	31/32 [25]	2-5/32 [55]	3-11/32 [85]	2-21/32 [67]	3-27/32 [98]	26 [12]	20 [129]

### ENGINEERING SPECIFICATION:

Zurn Z415-BZ1 floor and shower drain, Dura-coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and top assembly. EZ1™ drainage series is engineered to simplify product installation, comprised of concrete shield, up to 1" [25] of vertical post pour adjustment, pre-packaged shims for tilt correction and integrated, self-contained "Type B" light duty, heel proof strainer with rough-in cover for protection during concrete pour.

### OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET	'E' BODY HT. DIM.
2, 3, 4 [51, 76, 102]	_____ IC Inside Caulk	4-3/16 [106]
2 [51]	_____ IP Threaded	2-7/16 [62]
3 [76]	_____ IP Threaded	2-3/4 [70]
4 [102]	_____ IP Threaded	2-13/16 [71]
6 [152]	_____ IP Threaded	2-7/8 [73]
2, 3, 4 [51, 76, 102]	_____ NH No-Hub	3-13/16 [97]
2, 3, 4 [51, 76, 102]	_____ NL Neo-Loc	3-7/8 [98]

### PREFIXES

- \_\_\_\_\_ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- \_\_\_\_\_ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top\*
- \_\_\_\_\_ ZS D.C.C.I. Body Assembly w/ Polished Stainless Steel Top

### SUFFIXES

- \_\_\_\_\_ -AR Acid Resisting Epoxy Coated Cast Iron
- \_\_\_\_\_ -EF 3/4 [19] Extension Frame
- \_\_\_\_\_ -G Galvanized Cast Iron
- \_\_\_\_\_ -LR Low Rough-In (For 6 [152] and 8 [203] Strainers Only)
- \_\_\_\_\_ -P Trap Primer Connection (Specify 1/2\* [13] or 3/4 [19])
- \_\_\_\_\_ -SA Stabilizer Assembly for Sub-Floor Install (See Z1035)
- \_\_\_\_\_ -SQ Stabilizer Assembly for Steel Decking Install (See Z1035-Q)
- \_\_\_\_\_ -SR Stabilizer Ring Assembly for On-Grade Install
- \_\_\_\_\_ -TC Neo-Loc Test Cap Gasket (2-3-4 [51-76-102] NL Outlet Only)
- \_\_\_\_\_ -TSP Trap Seal Protection Device (Size Matches Drain Outlet Selected) (See Z1072)
- \_\_\_\_\_ -U 2 - 3-1/4 [51-83] High Post-Pour Extension Adapter
- \_\_\_\_\_ -UP 1-3/4 [44] Pre-Pour Adjustment Extension Adapter
- \_\_\_\_\_ -VP Vandal-Proof Secured Top
- \_\_\_\_\_ -Y Sediment Bucket

\* Regularly furnished unless otherwise specified.