



# Z415-SZ1


BODY ASSEMBLY W/ "TYPE S" STRAINER  
and EZ1™ TECHNOLOGY

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

**PATENT  
PENDING**

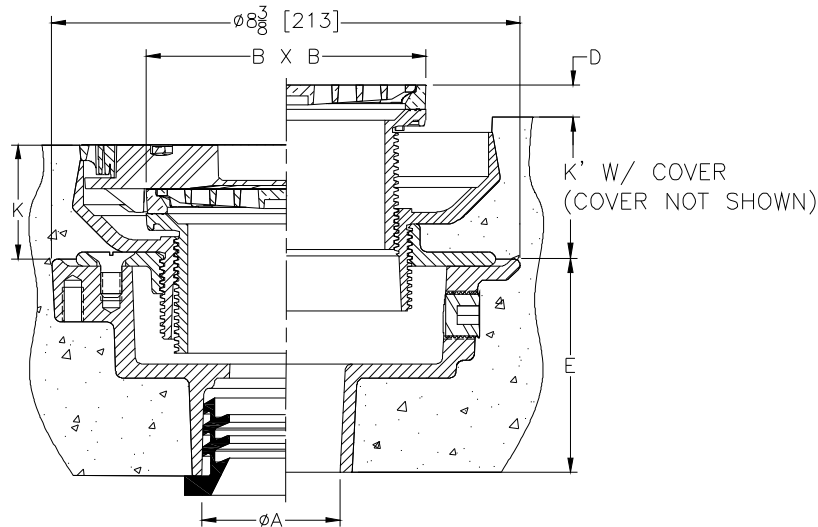

Note:  
Minimum K Dimension is Only  
Possible with -LR Option

Dimensions In Inches [mm]								Approx. Wt. Lbs.  [kg]	Strainer Open Area Sq. In [cm <sup>2</sup> ]
A  Pipe Size	B X B  Strainer Top Size	D		K		K'			
		Min.	Max.	Min.	Max.	Min.	Max.		
2, 3 [51, 76]	5 X 5 [127 X 127]	0	1 [25]	2-1/16 [52]	3-1/4 [83]	2-9/16 [65]	3-3/4 [95]	19 [9]	9 [58]
2, 3, 4 [51-76-102]	6 X 6 [152 X 152]	0	1 [25]	2-1/8 [54]	3-5/16 [84]	2-5/8 [67]	3-13/16 [97]	22 [10]	13 [84]
3, 4 [76-102]	8 X 8 [203 X 203]	0	15/16 [24]	2-1/2 [64]	3-11/16 [94]	3 [76]	4-3/16 [106]	27 [12]	27 [174]
6 [152]	8 X 8 [203 X 203]	0	15/16 [24]	2-1/2 [64]	3-11/16 [94]	3 [76]	4-3/16 [106]	28 [13]	27 [174]

## ENGINEERING SPECIFICATION:

Zurn Z415-SZ1 floor and shower drain, Dura-coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and top assembly. EZ1™ drainage series is engineered to simplify product installation, comprised of concrete shield, up to 1" [25] of vertical post pour adjustment, pre-packaged shims for tilt correction and integrated self-contained "Type S" nickel bronze light duty, heel proof strainer with rough-in cover for protection during concrete pour.

## OPTIONS (Check/specify appropriate options)

### PIPE SIZE

2, 3, 4 [51, 76, 102]  
2 [51]  
3 [76]  
4 [102]  
6 [152]  
2, 3, 4 [51, 76, 102]  
2, 3, 4 [51, 76, 102]

### (Specify size/type) OUTLET

\_\_\_\_\_ IC Inside Caulk  
\_\_\_\_\_ IP Threaded  
\_\_\_\_\_ IP Threaded  
\_\_\_\_\_ IP Threaded  
\_\_\_\_\_ IP Threaded  
\_\_\_\_\_ NH No-Hub  
\_\_\_\_\_ NL Neo-Loc

### 'E' BODY HT. DIM.

4-3/16 [106]  
2-7/16 [62]  
2-3/4 [70]  
2-13/16 [71]  
2-7/8 [73]  
3-13/16 [97]  
3-7/8 [98]

## PREFIXES

\_\_\_ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top  
\_\_\_ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top\*  
\_\_\_ ZS D.C.C.I. Body Assembly w/ Polished Stainless Steel Top

## SUFFIXES

\_\_\_ -AR Acid Resisting Epoxy Coated Cast Iron  
\_\_\_ -EF 3/4 [19] Extension Frame  
\_\_\_ -G Galvanized Cast Iron  
\_\_\_ -LR Low Rough-In  
\_\_\_ -P Trap Primer Connection (Specify 1/2 \*[13] or 3/4 [19])  
\_\_\_ -SA Stabilizer Assembly for Sub-Floor Install (See Z1035)  
\_\_\_ -SQ Stabilizer Q-Deck for Steel Decking Install (See Z1035-Q)  
\_\_\_ -SR Stabilizer Ring Assembly for On-Grade Install  
\_\_\_ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Outlet Only)  
\_\_\_ -TSP Trap Seal Protection Device (Size Matches Drain Outlet Selected) (See Z1072)  
\_\_\_ -U 2 - 3-1/4 [51-83] High Post-Pour Extension Adapter  
\_\_\_ -UP 1-3/4 [44] Pre-Pour Adjustment Extension Adapter  
\_\_\_ -VP Vandal-Proof Secured Top  
\_\_\_ -Y Sediment Bucket

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation

1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | Zurn Industries Limited

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

[www.zurn.com](http://www.zurn.com)

Rev. D

Date: 04/11/2019

C.N. No. 141213

Prod. | Dwg. No. Z415-SZ1