



Z6957-XL

Wall-Mounted Powered Sensor Faucet

TAG _____

Architectural/Engineering Specification:

The Nachi faucet maintains a sleek and simple design that can be paired with a matching Nachi soap dispenser for an automatic and user-friendly handwashing solution. ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

Product Features:

- Occupant Detection
Infrared convergence-type proximity sensor
30 second time out feature
- Spout module
Standard chrome plated cast brass
Three alternate finishes
- Also Includes
In-line filter
4 "AA" batteries
AC wall adaptor

Compatibility

Soap Dispenser:



Z6957-SD

Compliance and Certification:

- ADA Compliant
- ASME A112.18.1/CSA B125.1
- cUPC
- Lead Free Compliant
- Texas Accessibility Standard (TAS)



ADA
DESIGNED



XL LEAD FREE



TAS



WaterSense
Meets
EPA Criteria
UPWQ-RET

This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

In Canada - Consult local codes and standards.



Aerator Options:

	Flowrate GPM [Lpm]	Vandal Resistant	WaterSense Compliant	Outlet Type
-E	1.5[5.7]	✓	✓	Aerator
-J	1.5[5.7]	✓	✓	Laminar
-K	1.0[3.8]	✓	✓	Laminar
-L	1.0[3.8]	✓	✓	Aerator
-M	0.35[1.3]	✓		Non-Aerated
-N	0.5[1.9]	✓		Laminar

Suffix Options:

- MT** Mixing Tee
- MV** Temperature Mixing Valve
- SH** Supply Hoses for Mixing Valve
- TMV-1** Thermostatic Mixing Valve for Single Faucets
- Other**


Finish Options:

- BN** Brushed Nickel
- PN** Polished Nickel
- PB** Polished Brass

Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.


Rough-in dimensions/Overview dimensions

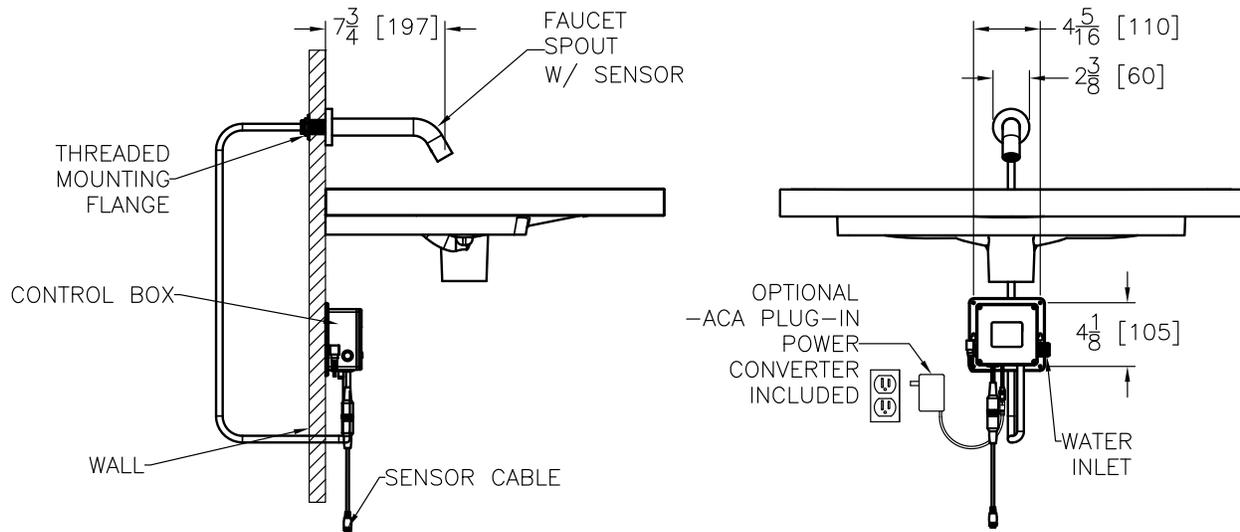


NOTE:

Recommended through hole diameter to properly mount the spout/shank is 1" to 1-1/8".

Optional Mixing Valves

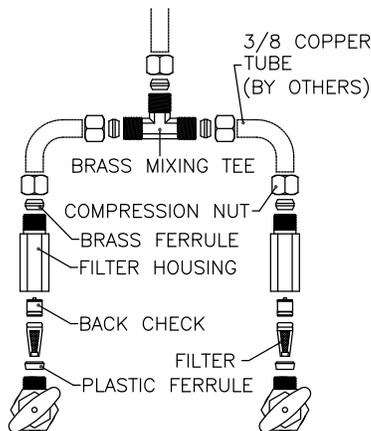

P6900-MT
Mixing Tee

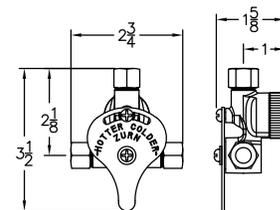

P6900-MV
Temperature Mixing Valve

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

In Canada - Consult local codes and standards.